


Cleanroom

igus® solutions for cleanrooms

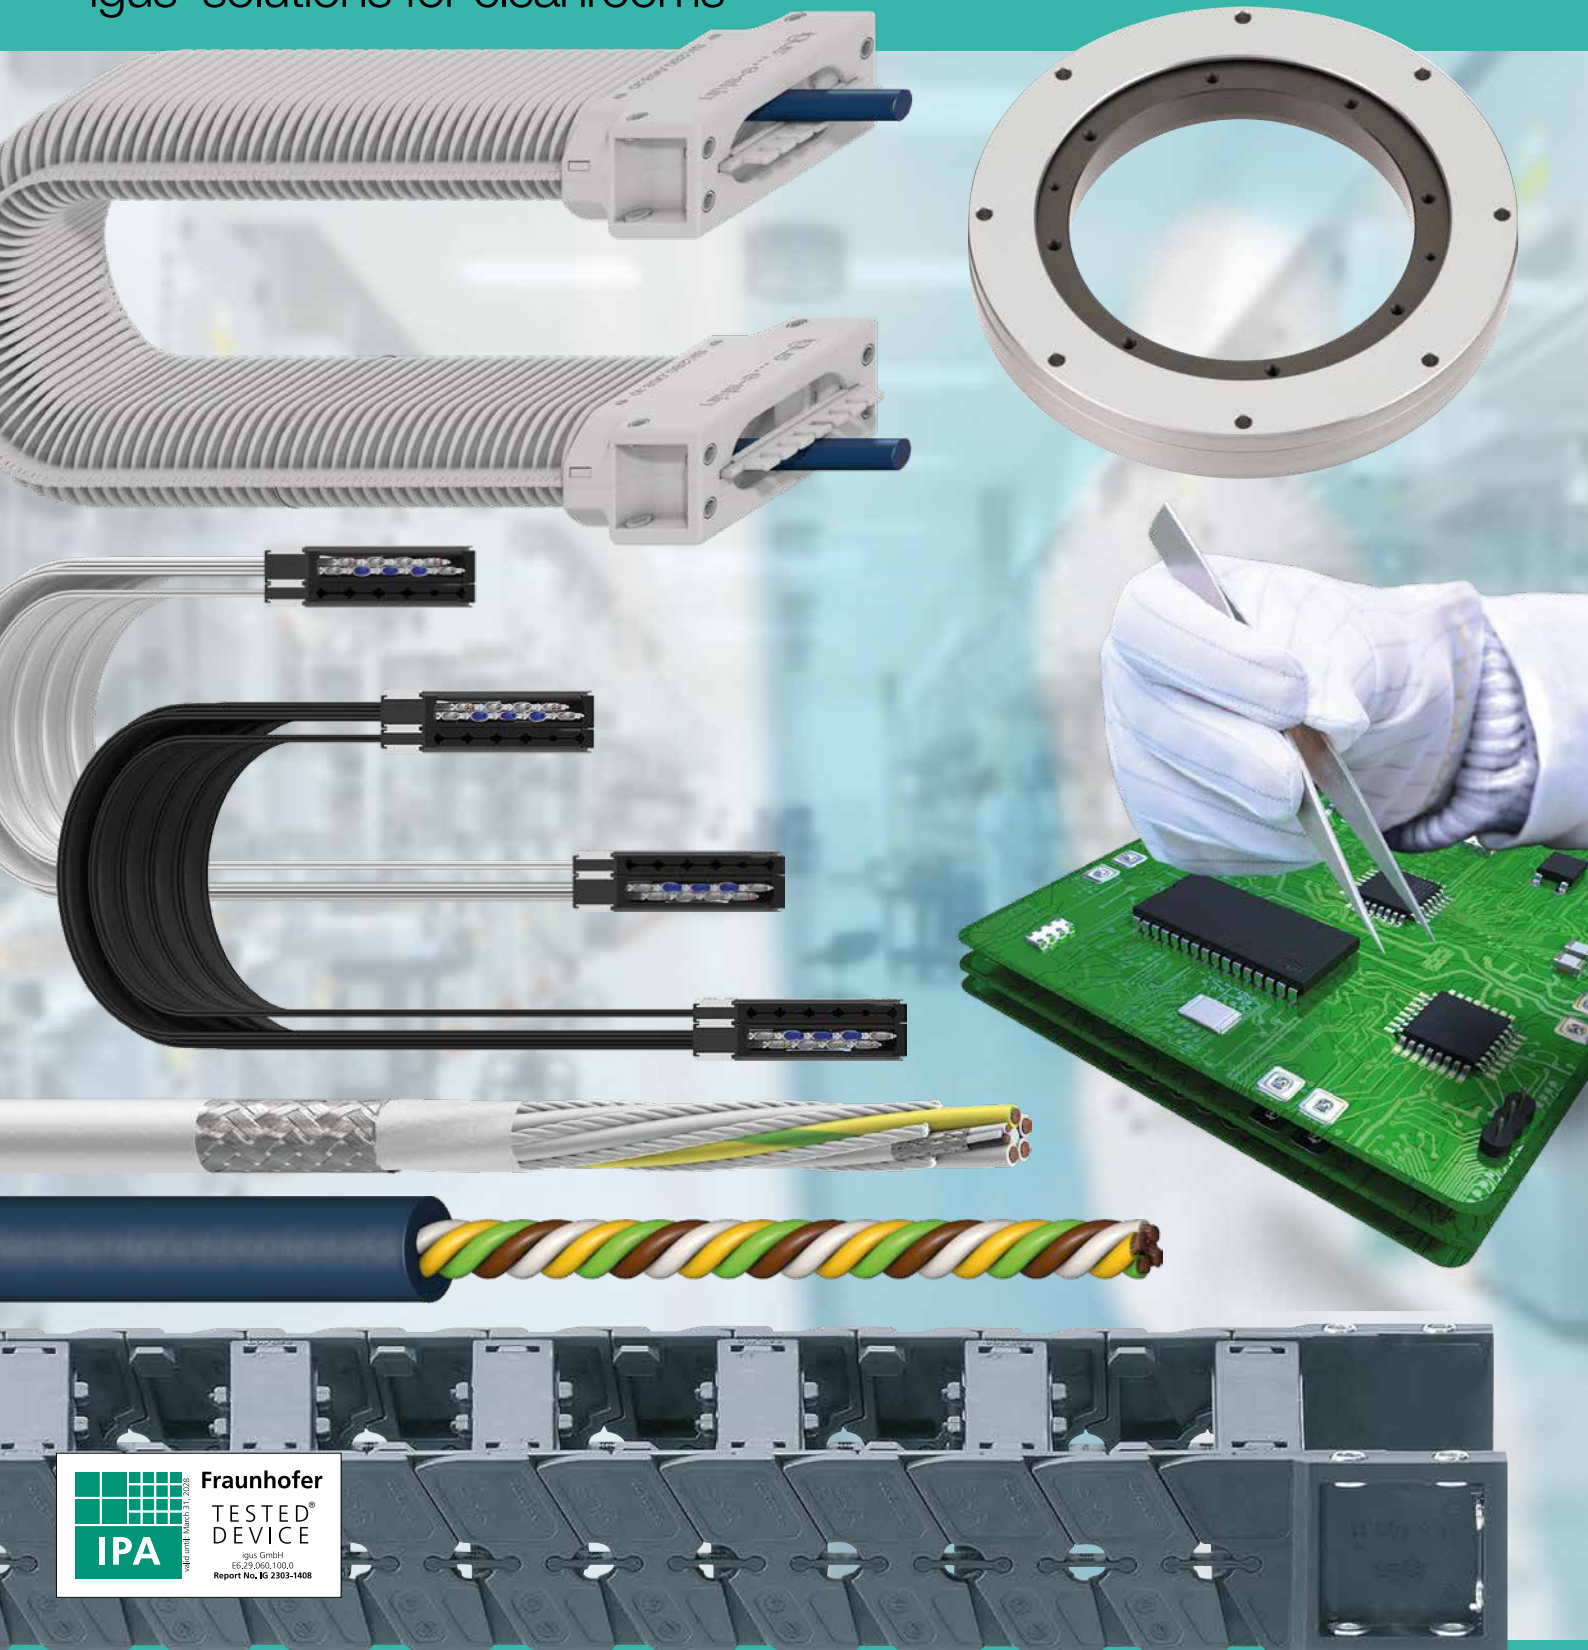

Fraunhofer

TESTED
DEVICE


igus GmbH
EG-25.060.100.0
Report No. IG 2303-1408

igus®

motion plastics®

... Tech up, cost down. It's our job!

0,1µm = 0.0001mm

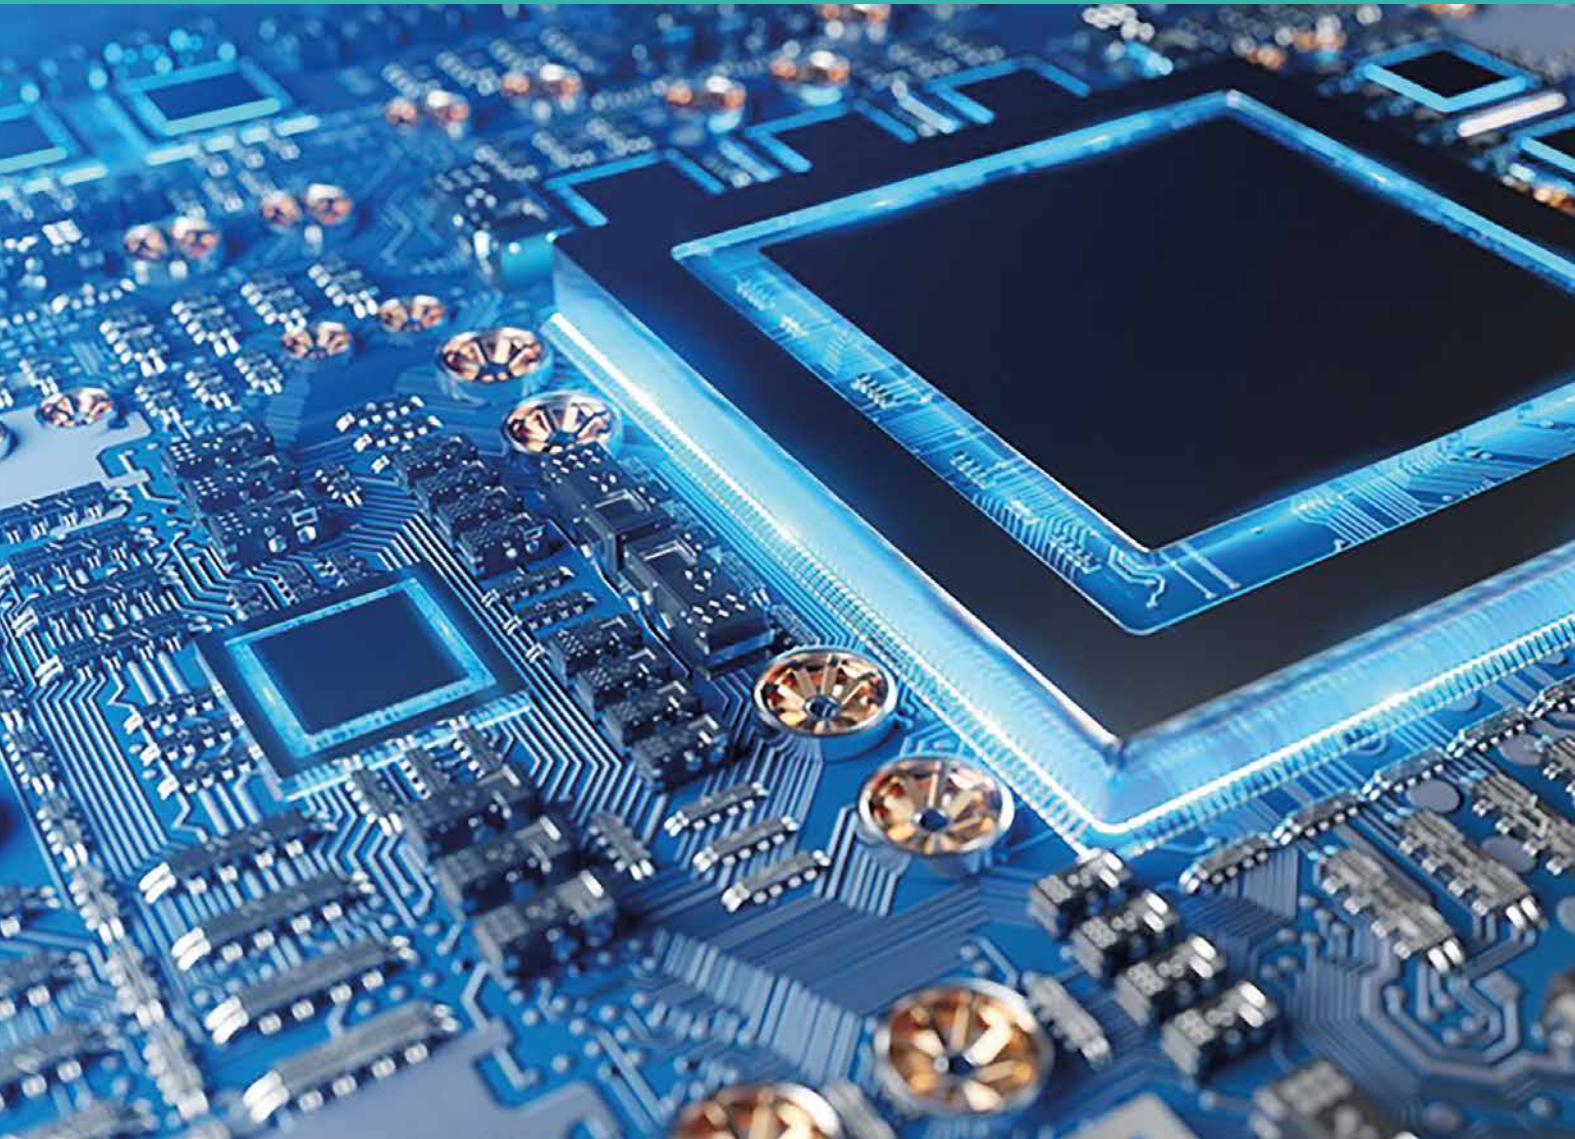

motion plastics®
in the #cleanroom

igus.eu/cleanroom

Table of contents

"The market demands openable energy supply solutions for cleanrooms."

Peter Mattonet
Produkt & Industry Manager
Mikroelectronics

Topics

08	igus® test laboratory	2	igus® facts at a glance
10	ESD-sensitive parts in the cleanroom	4	Cleanroom classes according to DIN EN ISO 14644-1
12	For dry rooms and cleanrooms	14	E6 e-chains® and e-tubes
28	Compact and modular: e-skin® flat with CFCLEAN	19	Custom solutions with iglidur® J
54	chainflex® cables for moving applications	20	Long travels in the cleanroom: GLO.CR
66	Bearing technology Cleanroom solutions	22	For smaller cleanrooms: e-chain system® C6
		24	Quiet, clean, fast, strong: e-chain system® E6.1
		38	For ESD-sensitive parts in the cleanroom – e-skin® flat ESD
		40	smart plastics: predictive maintenance
		42	Highest cleanroom class: e-skin® SK SKS SKY corrugated-tube energy supply systems
		46	Clean SCARA Cable Solution e-skin® SKS20/triflex® CSCS
		48	triflex® R TRC with fibre-rod module
		50	Highly dynamic, cleanroom-compatible E3 e-chains®
		52	Smooth-operating "T-band": T3 e-chains®
		62	readychain®: Ready-to-install harnessed e-chain systems®
		64	More solutions for ISO requirements

igus® facts at a glance

Cost-effective

Customer-specific manufacture without long waiting times

Cables available from stock

The **revolution** for the cleanroom: **e-skin® flat**

Modular design for easy replacement of chambers or stranded structures

Maintenance-free (24/7 use)

For more than **27 years**, we test energy chains for cleanrooms in the igus® test laboratory with its own cleanroom lab

Worldwide chip market grows to

\$624 billion
2024⁶⁾

\$721 billion
2025⁶⁾

Li-on battery demand increases by **671%**
2022 - 2030

Over 90% overall equipment effectiveness when producing OLED displays

Requirements: in 1m³ ambient air at most 10 particles ...
Max. particle size **0.1µm** corresponds to 0.0001mm.²⁾

- \$5.95 billion for assembly and packaging equipment
- \$8.42 billion for test stations
- \$109.76 billion for wafer production plants¹⁾



CLEAN!
2018

The improved corrugated hose for cleanroom applications received the 2nd prize in the 2018 Fraunhofer clean technology award.
<https://www.ipa.fraunhofer.de/en.html>

REINER!
2021

2021 "Reiner!" award for pioneering developments in clean technology. The IPA Fraunhofer Institute awards this prize for outstanding innovations in clean technology.
<https://www.ipa.fraunhofer.de/en.html>

With igus® clean plastics ...

... clean for cleanrooms

In robots or pick-and-place applications, in semiconductor manufacturing and microelectronics, igus® offers components for any cleanroom that bring Tech Up and Cost Down.


In cleanrooms, moving component abrasion must be especially low, as any contamination is harmful to products and processes. This costs money. We

develop and test our high-performance polymer products in our own cleanroom laboratory with the greatest care, and in order to show that our products are ideal for use in cleanrooms, we have the Fraunhofer Institute subject them to further tests. This gives us an IPA-tested product portfolio with the best possible cleanroom classification (ISO Class 1).

- Since 1997: energy chains for cleanrooms
- 3,800m² test laboratory unique in the industry with its own cleanroom lab
- Over 197 drylin® ISO 3-6 solutions
- Over 9,000 e-chain® parts with ISO 1-5
- Over 1,100 cables with ISO 1 and 2
- E6 for dry cleanroom with ISO 4
- 40 million guaranteed double strokes with CFCLEAN and 100 million double strokes with CF98.PLUS/CF99.PLUS
- ISO 1 after 60 million double strokes with e-skin® flat system



Kira Weller
Product Manager
e-chains®



Peter Mattonet
Product &
Industry Manager
Mikroelectronics



Bastian Lenz
Key Account
Microelectronics

1) <https://semi.org/en/news-media-press-releases/semi-press-releases/global-total-semiconductor-equipment-sales-forecast-to-reach-record-%24124-billion-in-2025-semi-reports>
2) igus® GmbH <https://blog.igus.eu/a-boost-to-your-overall-equipment-effectiveness-oe/>
3) igus® customer testimonial
4) <https://www.mckinsey.com/industries/automotive-and-assembly/our-insights/battery-2030-resilient-sustainable-and-circular>
5) igus® GmbH
6) <https://www.gartner.com/en/newsroom/press-releases/2023-12-04-gartner-forecasts-worldwide-semiconductor-revenue-to-grow-17-percent-in-2024>

Cleanroom classes according to DIN EN ISO 14644-1

ISO 1		ISO 2		ISO 3		ISO 4		ISO 5		ISO 6	
$\geq 0.1\mu\text{m}$	10 Particles per m ²	$\geq 0.1\mu\text{m}$	100 Particles per m ²	$\geq 0.1\mu\text{m}$	1,000 Particles per m ²	$\geq 0.1\mu\text{m}$	10,000 Particles per m ²	$\geq 0.1\mu\text{m}$	100,000 Particles per m ²	$\geq 0.1\mu\text{m}$	1,000,000 Particles per m ²
$\geq 0.2\mu\text{m}$	2 Particles per m ²	$\geq 0.2\mu\text{m}$	24 Particles per m ²	$\geq 0.2\mu\text{m}$	237 Particles per m ²	$\geq 0.2\mu\text{m}$	2,370 Particles per m ²	$\geq 0.2\mu\text{m}$	23,700 Particles per m ²	$\geq 0.2\mu\text{m}$	237,000 Particles per m ²
		$\geq 0.3\mu\text{m}$	10 Particles per m ²	$\geq 0.3\mu\text{m}$	102 Particles per m ²	$\geq 0.3\mu\text{m}$	1,020 Particles per m ²	$\geq 0.3\mu\text{m}$	10,200 Particles per m ²	$\geq 0.3\mu\text{m}$	102,000 Particles per m ²
		$\geq 0.5\mu\text{m}$	4 Particles per m ²	$\geq 0.5\mu\text{m}$	35 Particles per m ²	$\geq 0.5\mu\text{m}$	352 Particles per m ²	$\geq 0.5\mu\text{m}$	3,520 Particles per m ²	$\geq 0.5\mu\text{m}$	35,200 Particles per m ²
				$\geq 1.0\mu\text{m}$	8 Particles per m ²	$\geq 1.0\mu\text{m}$	83 Particles per m ²	$\geq 1.0\mu\text{m}$	832 Particles per m ²	$\geq 1.0\mu\text{m}$	8,320 Particles per m ²
								$\geq 5.0\mu\text{m}$	29 Particles per m ²	$\geq 5.0\mu\text{m}$	293 Particles per m ²
Six-part e-chains®	Corrugated tube e-skin® ▶ Page42										
e-skin® flat	e-chain® E3 ▶ Page50	e-chain® T3 ▶ Page52	e-chain® E2/000 series 1500 ▶ Page 58								
chainflex® CFCLEAN	chainflex® cables in e-chain® ▶ Page54	e-skin® SKS20 triflex® CSCS ▶ Page46	e-chain® E14 ▶ Page64	iglidur® PRT ▶ Page66	e-chain® E2/000 series 2500 ▶ Page64	triflex® R TRC ESD ▶ Page48	iglidur® PRT ▶ Page66				
		chainflex® cables in e-chain® ▶ Page54						E4.32 e-chain® ▶ Page64	GLO.CR ▶ Page20	drylin® W ▶ Page66	drylin® N ▶ Page66
								drylin® T ▶ Page66			



How big is a micron?

Human hair


0.0998mm

Pollen


0.04mm

Micron

0.001mm

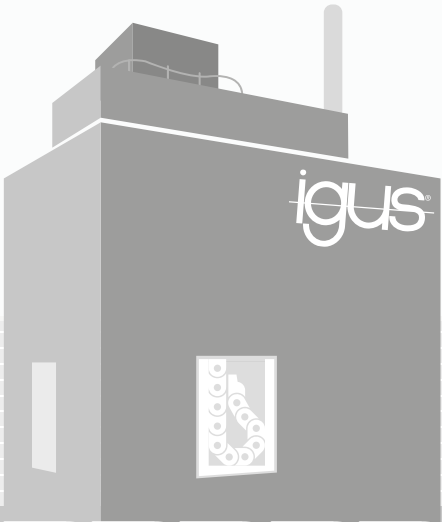


Cleanroom classes according to DIN EN ISO 14644-1

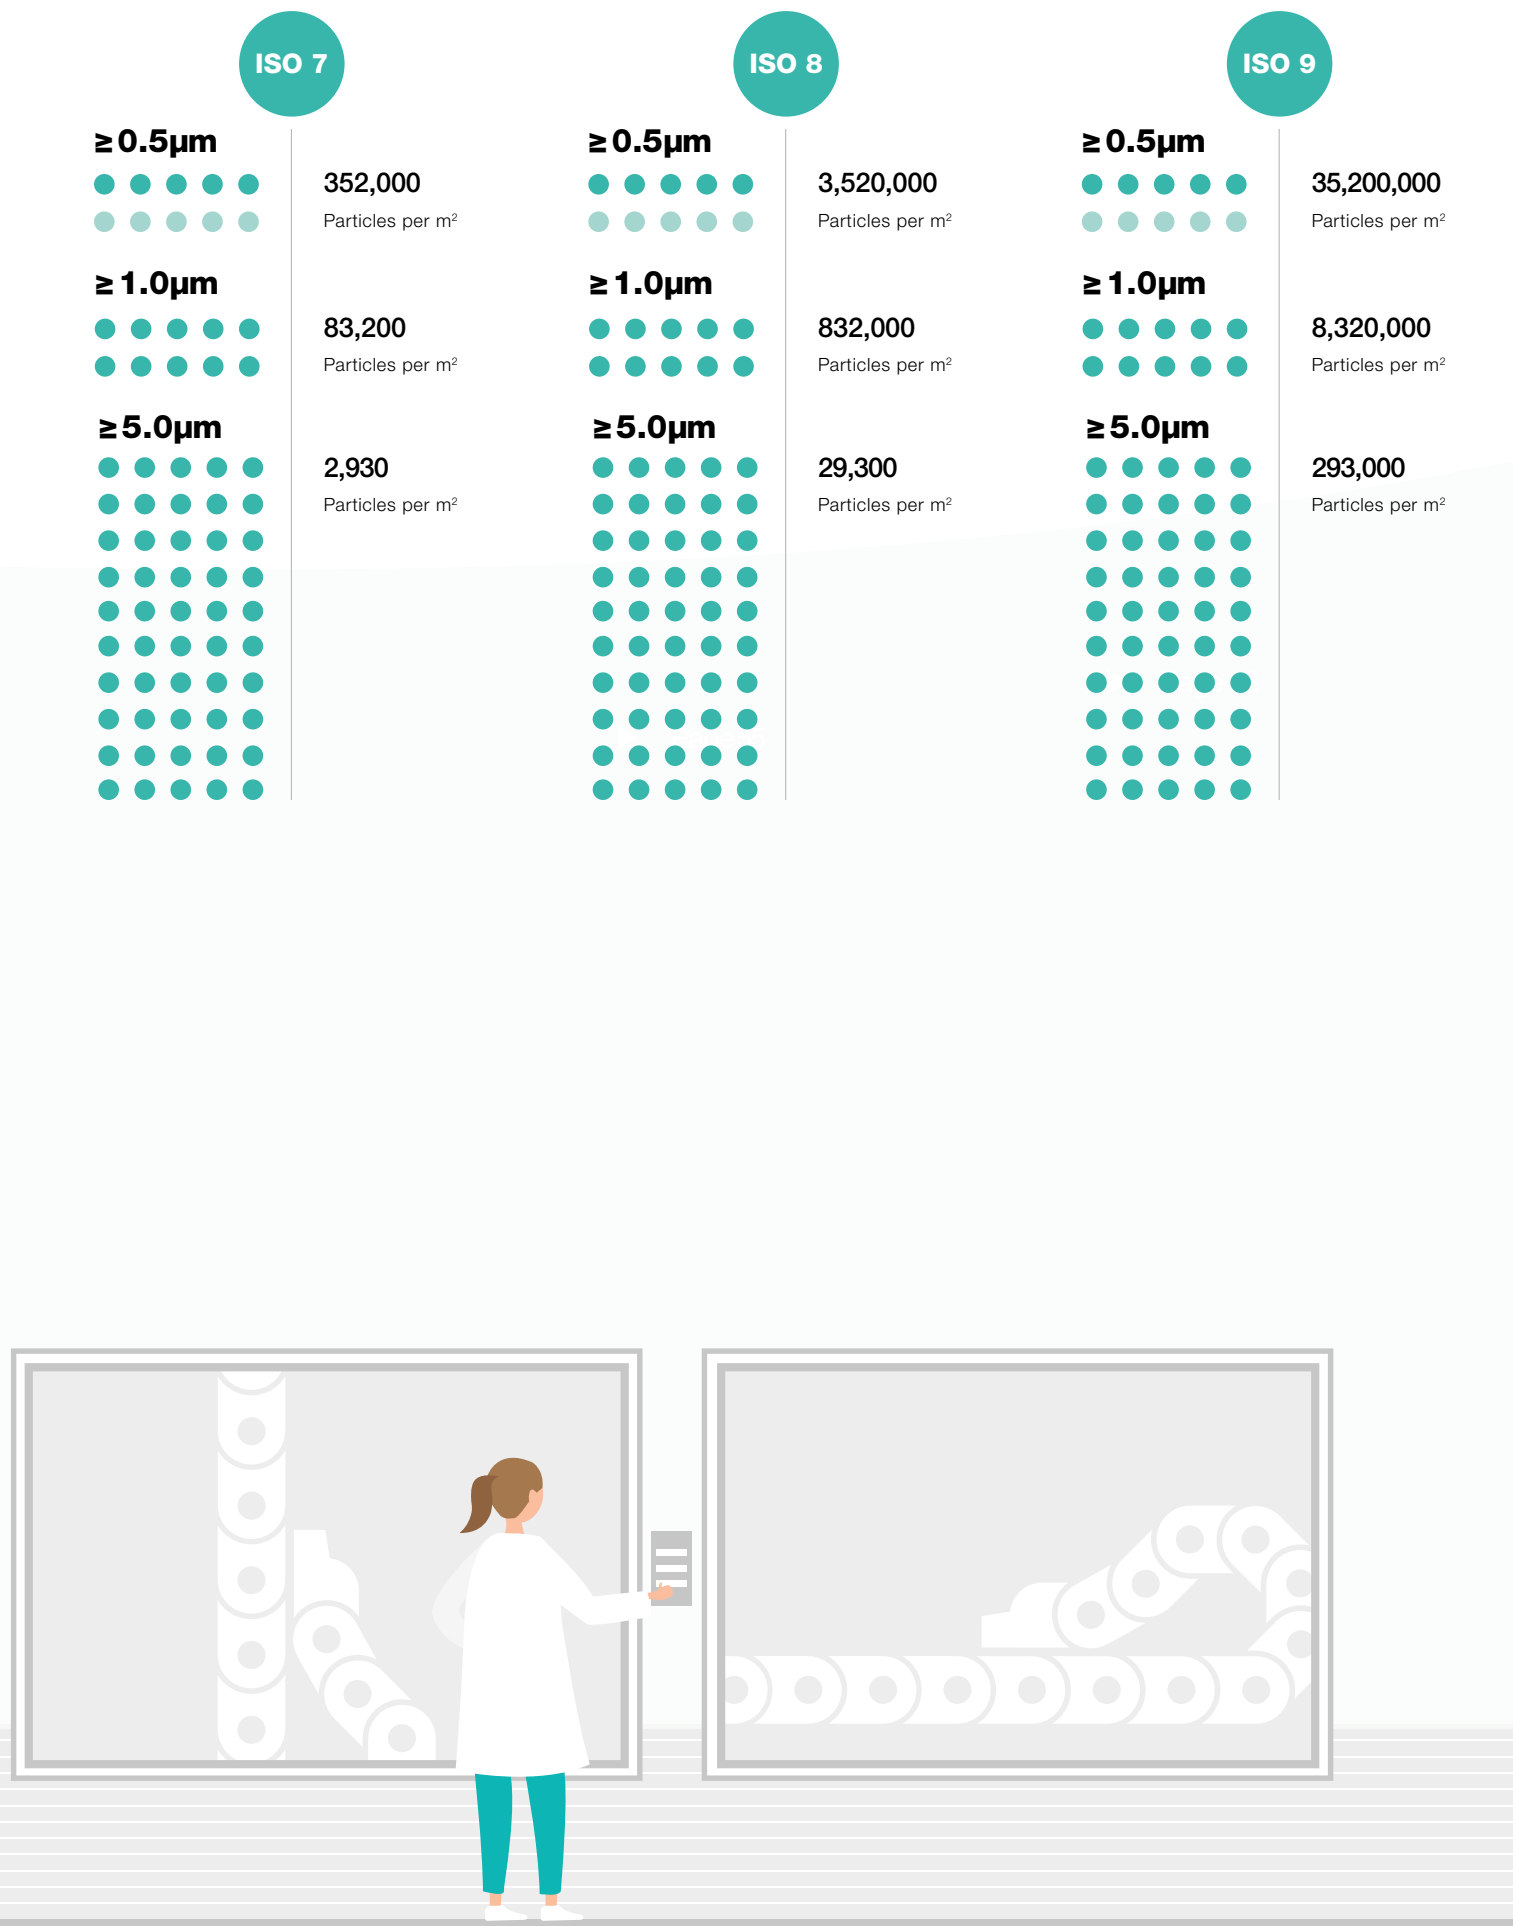

Corresponds to approx.		Limits (particle per m³) for particles equalling or greater than ...					
Class	FED STD 209E	≥ 0.1µm	≥ 0.2µm	≥ 0.3µm	≥ 0.5µm	≥ 1µm	≥ 5µm
ISO 1		10	2				
ISO 2		100	24	10	4		
ISO 3	1	1,000	237	102	35	8	
ISO 4	10	10,000	2,370	1,020	352	83	
ISO 5	100	100,000	23,700	10,200	3,520	832	29
ISO 6	1,000	1,000,000	237,000	102,000	35,200	8,320	293
ISO 7	10,000				352,000	83,200	2,930
ISO 8	100,000				3,520,000	832,000	29,300
ISO 9						8,320,000	293,000

Cleanroom class										
Product*	Page	ISO 1	ISO 2	ISO 3	ISO 4	ISO 5	ISO 6	ISO 7	ISO 8	ISO 9
Six-part e-chains®	12	●								
chainflex® CFCLEAN	28	●								
chainflex® cables in e-chain®	54	●	●							
drylin® N low-profile guides	66						●			
drylin® T rail guides	66					●				
drylin® W profile guides	66						●			
e-chain® E14	64		●							
e-chain® E4.1	64					●				
O6 e-chain system®	22	●								
E3 e-chain system®	50	●								
E6.1 e-chain system®	24	●								
e-chain system® T3	52		●							
e-skin® flat	30	●								
e-skin® flat ESD	38	●								
e-skin® SK SKS SKY	42	●								
e-skin® SKS20 / triflex® CSCS	46		●							
GLO.CR	20					●				
iglidur® PRT-04-100-CR	66			●	●					
e-chain® series 1500	64		●							
e-chain® series 2500	64			●						
triflex® R TRC ESD	48				●					

For details of the individual ISO classes, please refer to product pages.

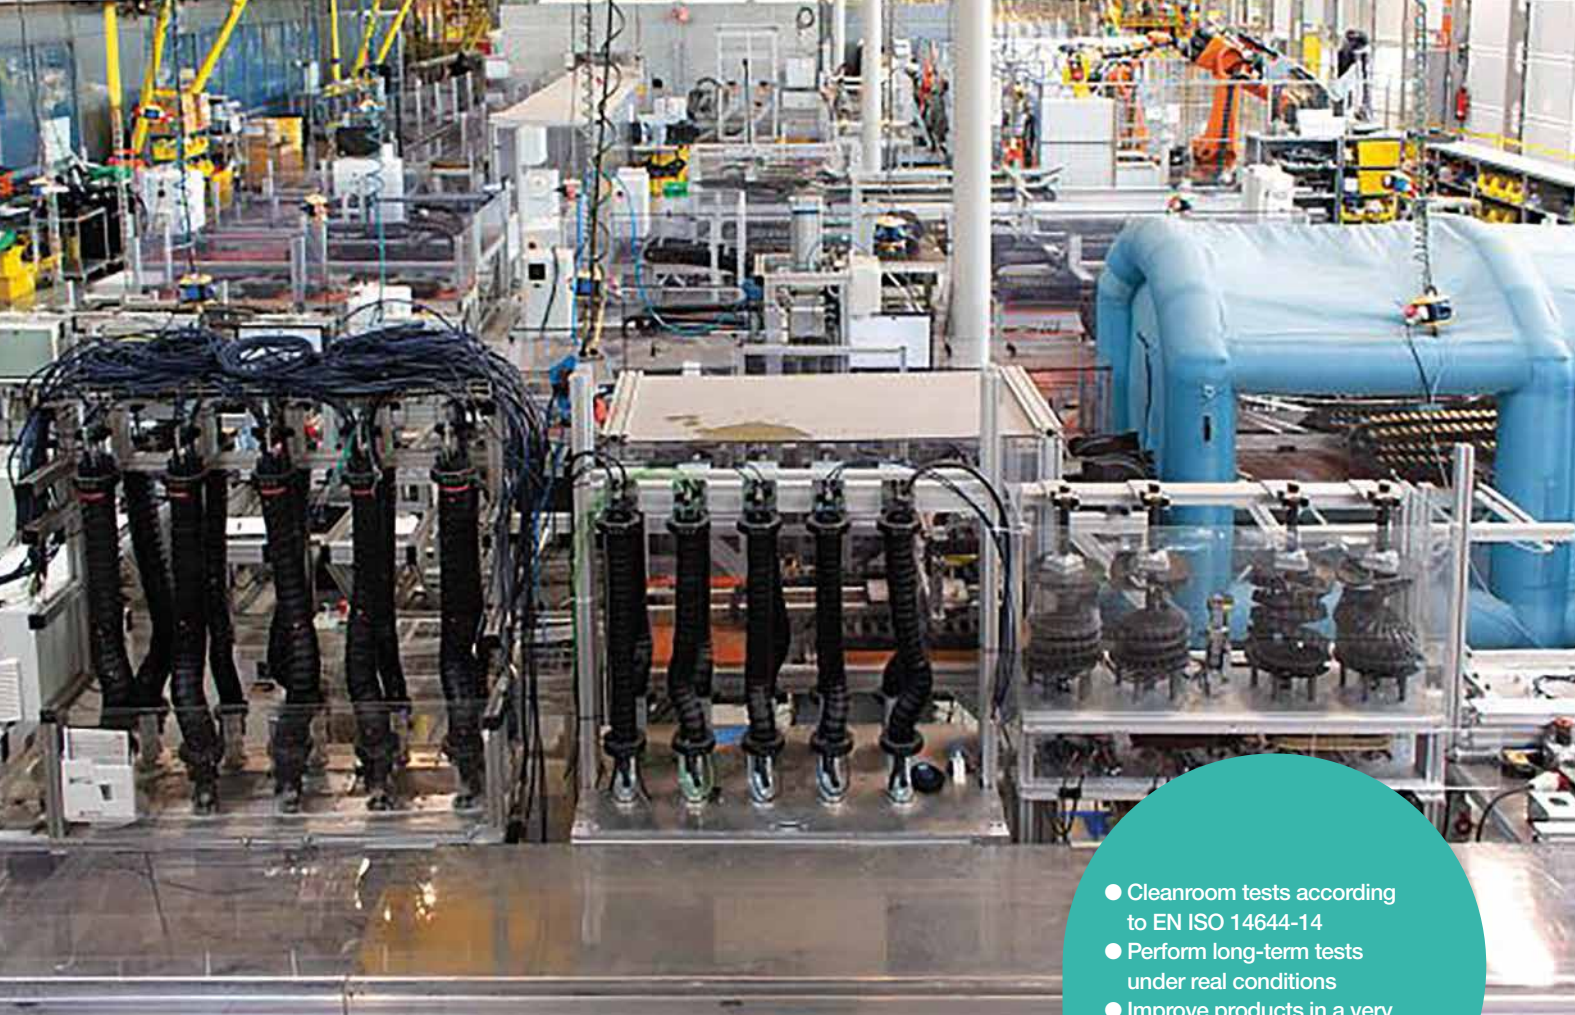

- Cleanroom tests according to EN ISO 14644-14
- Perform long-term tests under real conditions
- Improve products in a very short time
- Implement customer-specific assemblies

Laboratory and development

clean plastics testing

igus® is among the leading manufacturers of energy chains for cleanroom technology and has been having its products successfully tested since 1997. To develop new cleanroom-compatible motion plastics faster, Fraunhofer IPA, working as a development and certification partner on behalf of igus®, has designed

and built a customised cleanroom laboratory with an ISO Cleanroom Class 1 system in Cologne. Customer tests can be performed and new igus® developments tested in advance under real-world conditions in a very short time in the new laboratory.

igus.eu/cleanroom-laboratory



... in manufacture

igus® cleanroom facility in Korea ... packaging products in a cleanroom

For semiconductor producers such as Samsung and SK Hynix, even particles as small as 0.0001mm are a business risk. This is why they are placing ever stricter requirements on suppliers of cleanroom-compatible machine components. In Korea, we are responding by building a cleanroom to assemble and package our energy supply systems.

Suppliers like igus® must also take care not to contaminate cleanroom products during assembly and shipping. This is because more and more customers want to be able to use the components without having to clean them first.

In order to assemble and package cleanroom products so that they are as sterile as possible, we commissioned a cleanroom in Korea. A filter system creates constant negative pressure in its interior and replaces the air 450 times per hour. In order to keep contamination as low as possible, employees wear protective clothing.

The concept of assembling and packaging products in the cleanroom can be found at other igus® locations as well, such as the headquarters in Cologne, Germany, where another cleanroom is being built. Fully harnessed systems will be manufactured and can be shipped to the customer sealed in film.



For ESD-sensitive cleanroom parts ...




igidur® i8-ESD:
dissipative laser sintering
material for durable,
abrasion-resistant 3D
printing components



igubal® ESD:
dissipative thanks to side
links made of ESD material

igidur® F3:
dissipative with ESD
certificate

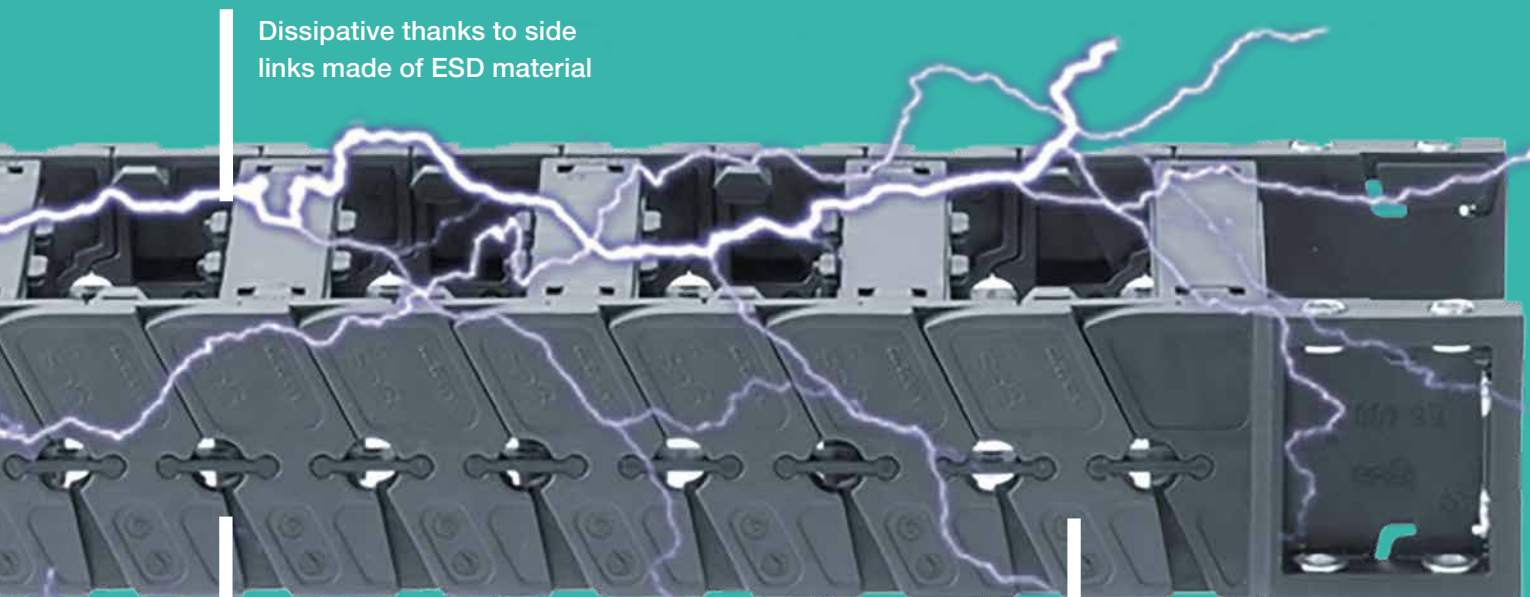

Dissipative thanks to side
links made of ESD material

For highly dynamic
applications with
extremely low
vibration

Long service life with
modular crossbar
system

Revolutionises your overall effectiveness ESD with igus® e-chains®


The need to prevent static buildup in moving applications has been increasing in modern production equipment. Measurements of the electrical surface leakage resistance for igus® e-chains® made from the special igumid® GC material were made in 1992 by the igus® GmbH together with the PTB (Physikalisch-Technische-Bundesanstalt) in Braunschweig, supplemented by additional certifications in 1998 and 1999 according to DIN 53482 and the guidelines for static electricity ZH1/200 of the Federation of Trade Associations. igus® recommends using the igumid® ESD material to discharge such electrostatic energy in the production of sensitive electrical components. igumid® ESD has been fully tested for over 10 million cycles in the igus® test laboratory.

- ESD material tested with over 10 million cycles for highest requirements
- Openable e-chains® with mounting brackets and interior separation in ESD and ATEX design, available from stock
- Proven through years of use in explosion-proof areas
- Short delivery times

igus.eu/esd



100% of the produced
igus® ESD e-chains®
are checked for their
continuous conductivity
from one end to the other

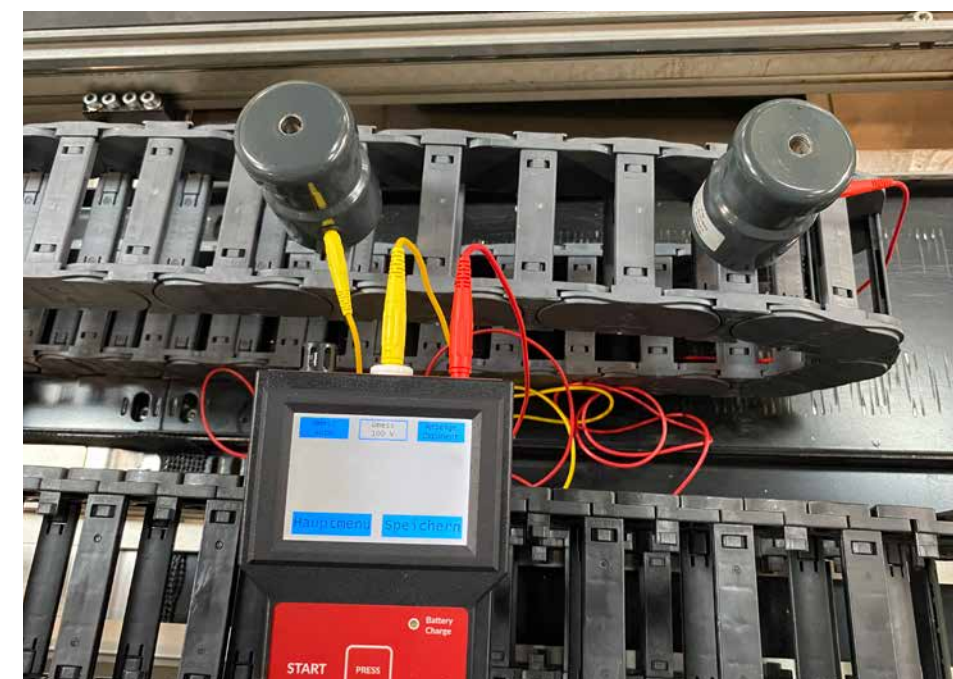

Conductivity of igus® products made of igumid® ESD

In contrast to temporary conductive surface coatings or volatile incorporated antistatic agents, the additives used offer long lasting and maintenance-free conductivity. If individual e-chain components offer conductivity, this is not sufficient: the whole e-chain® from one

end to the other must have continuous conductivity. All igus® products made from igumid® are optimised in this regard and the continuous conductivity is measured and documented prior to delivery with 100% testing. Only e-chains® that have passed this test are provided with the test

seal and delivered. Colour* of igumid® ESD products: similar to RAL7015, slate-grey to ensure distinguishability from standard materials.

(*Exception: cover zipper and trifix® R - here black in colour)

For dry rooms and cleanrooms

NEW

A series usable for all areas: cleanroom, dry cleanroom, and standard environments

Certification (the first of its kind) by Fraunhofer IPA for dry cleanroom, ISO 4

Important contribution to e-mobility

The first e-chain® for IPA ISO Class 4 dry cleanrooms

The proven E6.29 series made of standard material is now certified by Fraunhofer IPA for use in dry cleanrooms for ISO Cleanroom Class 4. The E6.29 was tested in a dry cleanroom with a dew point of -40°C (corresponding to a relative humidity of $< 1\%$) of ISO

Cleanroom Class 3 with three different parameter sets ($v=0.5\text{m/s}$, $a=1\text{m/s}^2$; $v=1\text{m/s}$, $a=2\text{m/s}^2$ and $v=2\text{m/s}$, $a=4\text{m/s}^2$) and has achieved the best possible result (ISO 4). Standard catalogue parts with seven interior heights and various widths and radii available directly from stock.



Battery production for the mobility of tomorrow

The first certified energy chain for dry cleanrooms

The days of the combustion engine seem to be numbered because the car of the future will be electric. The battery system is essential for electric mobility. So lithium-ion batteries are a key technology of our time, one that has been greatly refined in recent years. To guarantee error-free production and thus long battery life, the production process must be continuously optimised. Battery production systems require special environmental conditions achieved by combining dry rooms and cleanrooms. System automation and the increasing number of plants has also increased the need for reliable cable guidance that meets these high requirements. So the Fraunhofer Institute for Manufacturing Engineering and Automation IPA has teamed up with the Cellforce Group to develop a mobile dry cleanroom "tent". Classic stationary cleanrooms are a suboptimal solution for some applications due to the long planning and implementation times, large space requirement, and the longterm occupancy of valuable production areas. The new DryClean-CAPE®, a more flexible and cost-effective alternative, creates an environment that is not only

high-purity, but also low-humidity. The tent-like cleanroom system consists of two different covers, resulting in dryness combined with freedom from particles due to separate, independent air treatment units. This unique combination offers an ideal, flexible production environment, and environment plays a decisive role in product quality, especially in battery cell and automobile production.

That is why the IPA has now also developed a new type of certificate to document the ISO cleanroom classification under dry room conditions. The igus® E6 e-chain® series is the very first cable guidance system to be certified by the IPA under dry room conditions. The result: ISO class 4. This makes igus® one of the pioneers in this area. The e-chain® was tested in a dry cleanroom with a dew point of -40°C , which corresponds to a relative humidity of $< 1\%$ at room temperature of 22°C . The energy chain, which has been proven for many years, is now also suitable for safe use in dry room applications. At the same time, the E6 crossbars are being subjected to an endurance test in a dry room in the in-house igus® test laboratory. They have already undergone 10 million

double strokes - and the tests are still going. The durable e-chain® made of high-performance plastics optimised for friction and wear is available directly from stock as a standard catalogue part with various inner heights, widths, and radii.



E6.29

Crossbars removable along the inner and outer radius

Inner height	29mm
Inner width	30 - 140mm



DryClean-CAPE® for dry-room testing; Source: Fraunhofer Institute for Manufacturing Engineering and Automation IPA



Kira Weller, e-chain® product manager (left) and Dominik Barten, development engineer (right) explain the meaning of the new certificate.

Very quiet, abrasion-resistant



Extremely quiet, low-vibration operation

The E6 series offers numerous advantages in addition to long life. It provides extremely quiet, low vibration operation, complementing low vibration linear drives. It has virtually no polygon effect which can occur during the rolling motion of a standard e-chain®. The ultra-low noise levels have been confirmed in a recent report by the Rheinland Technical Inspection Agency. Our extensive product range offers the right e-chain® size for any application; a wide range of interior separation is also available.

- ▲ Dry-room-compatible energy supply system with a long service life (tested in the igus® laboratory under dry room conditions)
- ▼ A series usable for all areas: cleanroom, dry cleanroom, and standard environments
- Certification (the first of its kind) by Fraunhofer IPA for dry cleanroom, ISO 4
- Important contribution to e-mobility (battery production, see page ¹²⁾)
- 🔗 Optional push-pull monitoring

For highly dynamic applications in cleanrooms



A linear drive provides the highly dynamic feed for PCBs. This system is twice as fast as handling units with a toothed-belt drive; designed to withstand high dynamic loads, E6 e-chains® ensure a supply of power, coolant and control data with ultra-low noise and vibration



Cleanroom qualification of E6 e-chains®

By using a special material, the already low abrasion behaviour of the e-chain® can be reduced even further. In many applications where cumbersome special solutions are required, a simple standard e-chain® can be used instead. IPA tests confirm that standard igus® e-chains®

meet cleanroom requirements. "Tested and certified as very good!" e-chains® for cleanroom applications demand very high wear resistance of moving parts. e-chains®, for example, must be wear-resistant, in order to meet the normal requirements for such a sensitive environment.

Benefits

- Undercut design for high lateral stability
- High push/pull strength for long travels and unsupported lengths
- Well-suited for side-mounted applications
- Noise-reducing "brakes" and noise dampers (optional)
- Inner and outer links for quick assembly, with or without pretension

Typical application areas

- Cranes, including indoor cranes
- Composting plants, sewage treatment plants
- Machine tools, general mechanical engineering

Attachment from any side: with KMA mounting brackets

Quiet from 37dB(A): small pitch for quiet, smooth running

Long service life: low vibration, high tensile strength

Dynamic: high speeds and accelerations

Quick assembly: openable along the inner and outer radii

Modular design: can be easily lengthened and shortened

High strength: for unsupported applications

Application example

High speed in cleanrooms



Schmid Technology Systems, Marijan Strugar, Niedereschach, Germany

An igus® e-chain® from the E6 range accelerates work processes in this wafer-handling application in chip production. The E6 easily supplies energy at acceleration rates of up to 4m/s² and speeds of up to 6m/s. Its low abrasion is very important because purity is critical in chip production. The E6 is cleanroom-compatible and has Fraunhofer IPA certification.

Smooth-running energy chains for camera robots in the Tagesschau news studio



The cable guides have to work around the clock and at the same time be maintenance-free and quiet. Since April 2014, all ARD-aktuell programs have been produced in a new television studio that is equipped with state-of-the-art technology. A highlight are three camera robots suspended under the ceiling that implement camera shots with smooth movements and the highest precision. Smooth running, low vibration and wear resistance are the main requirements for the plastic energy

chains for guiding the extensive cable packages. Consulting skills also played an extremely important role in the project.

Profile

- **What was needed:** E6 energy chains, chainflex® control cables, guide trough
- **Requirements:** Quiet operation, no maintenance, long service life, smooth, fluid movements
- **Industry:** film and camera technology

● **Success for the customer:** The E6 e-chain® achieves a long running performance that can be calculated in advance. Abrasion-resistant connectors and a small pitch ensure extremely quiet, low-vibration operation. A special solution was developed for the longest travels. The solution featured a custom-made moving end, special support rollers, rubber-coated plastic rollers, or special suspensions for the guide trough.

Extremely low noise, vibration and abrasion, cleanroom suitable

E6 e-chain system®

E6 e-chain®



E6.29 e-chain®

Crossbars removable along the inner and outer radius - standard

Inner height	29mm
Inner width	30 - 140mm



E6.35 e-chain®

Crossbars removable along the inner and outer radius - standard

Inner height	35mm
Inner width	30 - 140mm



E6.40 e-chain®

Crossbars removable along the inner and outer radius - standard

Inner height	40mm
Inner width	40 - 300mm



E6.52 e-chain®

Crossbars removable along the inner and outer radius - standard

Inner height	52mm
Inner width	40 - 300mm



E6.62 e-chain®

Crossbars removable along the inner and outer radius - standard

Inner height	62mm
Inner width	50 - 400mm



E6.80L e-chain®

Crossbars removable along the inner and outer radius - standard

Inner height	80mm
Inner width	87 - 550mm



E6.80 e-chain®

Crossbars removable along the inner and outer radius - standard

Inner height	80mm
Inner width	50 - 600mm



R6.29 e-tube

Fully enclosed – lids removable along the inner and outer radii

Inner height	28mm
Inner width	30 - 120mm



R6.40 e-tube

Fully enclosed – lids removable along the inner and outer radii

Inner height	40mm
Inner width	62mm



R6.52 e-tube


Fully enclosed – lids removable along the inner and outer radii

Inner height	52mm
Inner width	50 - 200mm

R6 e-tube

E6 series with inner heights of 29, 40, and 52mm

Three series now available from stock with ESD certificate

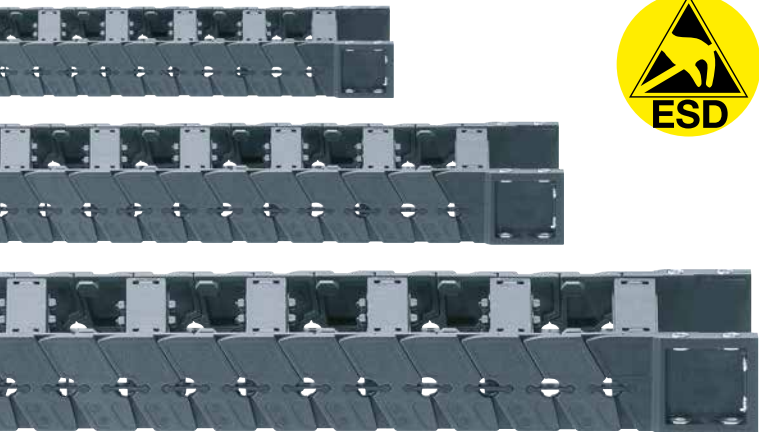

Three new E6 series (a total of 88 parts) with inner heights of 29, 40, and 52mm are now available from stock as electrically conductive ESD variants and can be configured online. They can be used to reliably avoid static charges in the area of manufacturing processes for electronic components or assemblies.

- ▲ Avoid ESD faults due to static electricity
- ▼ Catalogue product - no individual set-up costs
- E6.ESD meets the requirements for ESD-protected areas (EPA) according to IEC 61340-5-1 and DIN EN 61340-5-1
- Series production uses fewer resources than individual order-specific production
- 🔗 Optional push-pull monitoring

e-chain system®
E6.ESD

E6.40.ESD
Openable along inner and outer radius

Inner width	40 - 125mm
Bend radius	63 - 150mm

E6.29.ESD
Openable along inner and outer radius


Inner width	30 - 100mm
Bend radius	55 - 150mm

E6.52.ESD
Openable along inner and outer radius

Inner width	40 - 125mm
Bend radius	75 - 150mm

Custom solutions with iglidur® J

Extremely high wear resistance and long service life

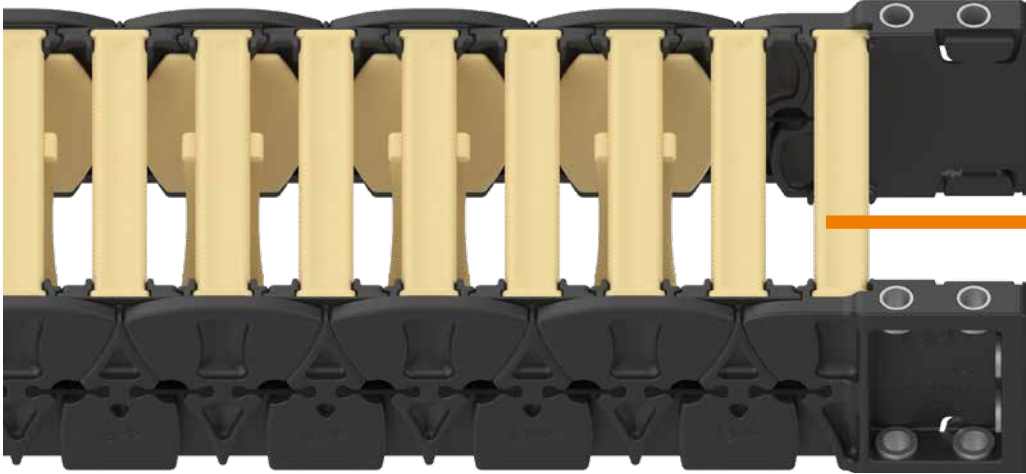

igidur® J, a material known from the iglidur® range of materials, is extremely wear-resistant and drastically minimises abrasion between cables.




- Cleanroom-optimised crossbars and interior separation made of iglidur® J reduce the abrasion of the cables guided in the C6 by 77%*
- Quickly configure interior separation in the ring-shaped, oval e-skin®
 - Configure wear-optimised ring separators, full-width shelves and separators using drag & drop
 - Free download of CAD data

- The most important specifications at a glance:
- Very good wear resistance at room temperature
 - Very good wear resistance at medium temperatures
 - Excellent coefficients of friction
 - Low moisture absorption
 - High media resistance
 - Resistant to edge pressure
 - Resistant to shocks and impacts
 - Resistant to dirt and dust
 - Mould-resistant according to DIN EN ISO 846

Special cables and e-chains® for SMD pick-and-place machines

With chainflex cables, which were specially developed for semiconductor assembly in the world's largest laboratory for moving cables, the customer benefits from minimal wear and tear and maximum reliability.

Abrasion/cable tests in the igus® laboratory.
The iglidur® J material produces 77% less abrasion.*

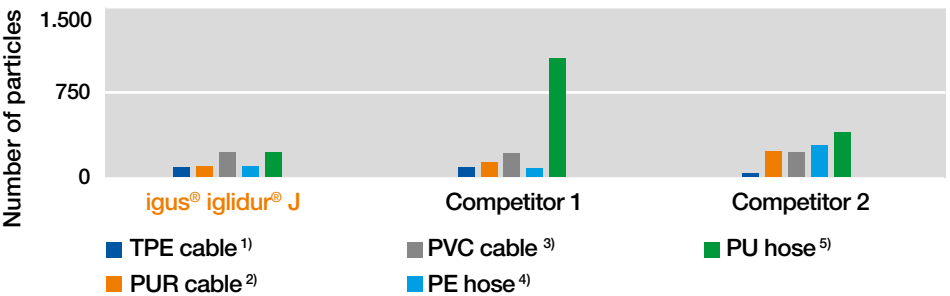

*Measured and averaged in use with five different friction partners:
1) CF340.250.01
2) CF270.UL.350.01.D
3) CF886.350.01
4) CAPE.A.10.0 5) CAPU.A10.0
compared to the standard material igumid® G

GLO.CR

Long travel in
cleanrooms




Extremely low particle emission thanks to
optimised IPA ISO Class 5 roller surfaces

Advantages of cleanroom chains, including for long travels. Here, the upper run of the cleanroom-compatible E6.52 e-chain® is supported over long travels, eliminating particle emissions from gliding. Contacts are minimised by motor-controlled roller guide rocking.

- ▲ Very low particle emission thanks to optimised roller surfaces and spring tensile force, can be motorised (optional)
- ▼ One system usable for all production environments
- IPA certification of a complete system with four supports and E6.52 with Cleanroom Class ISO 5
- No material contamination from particles
- 🔗 Optional push-pull monitoring

Test report

Testing cleanroom suitability according to ISO 14644-14

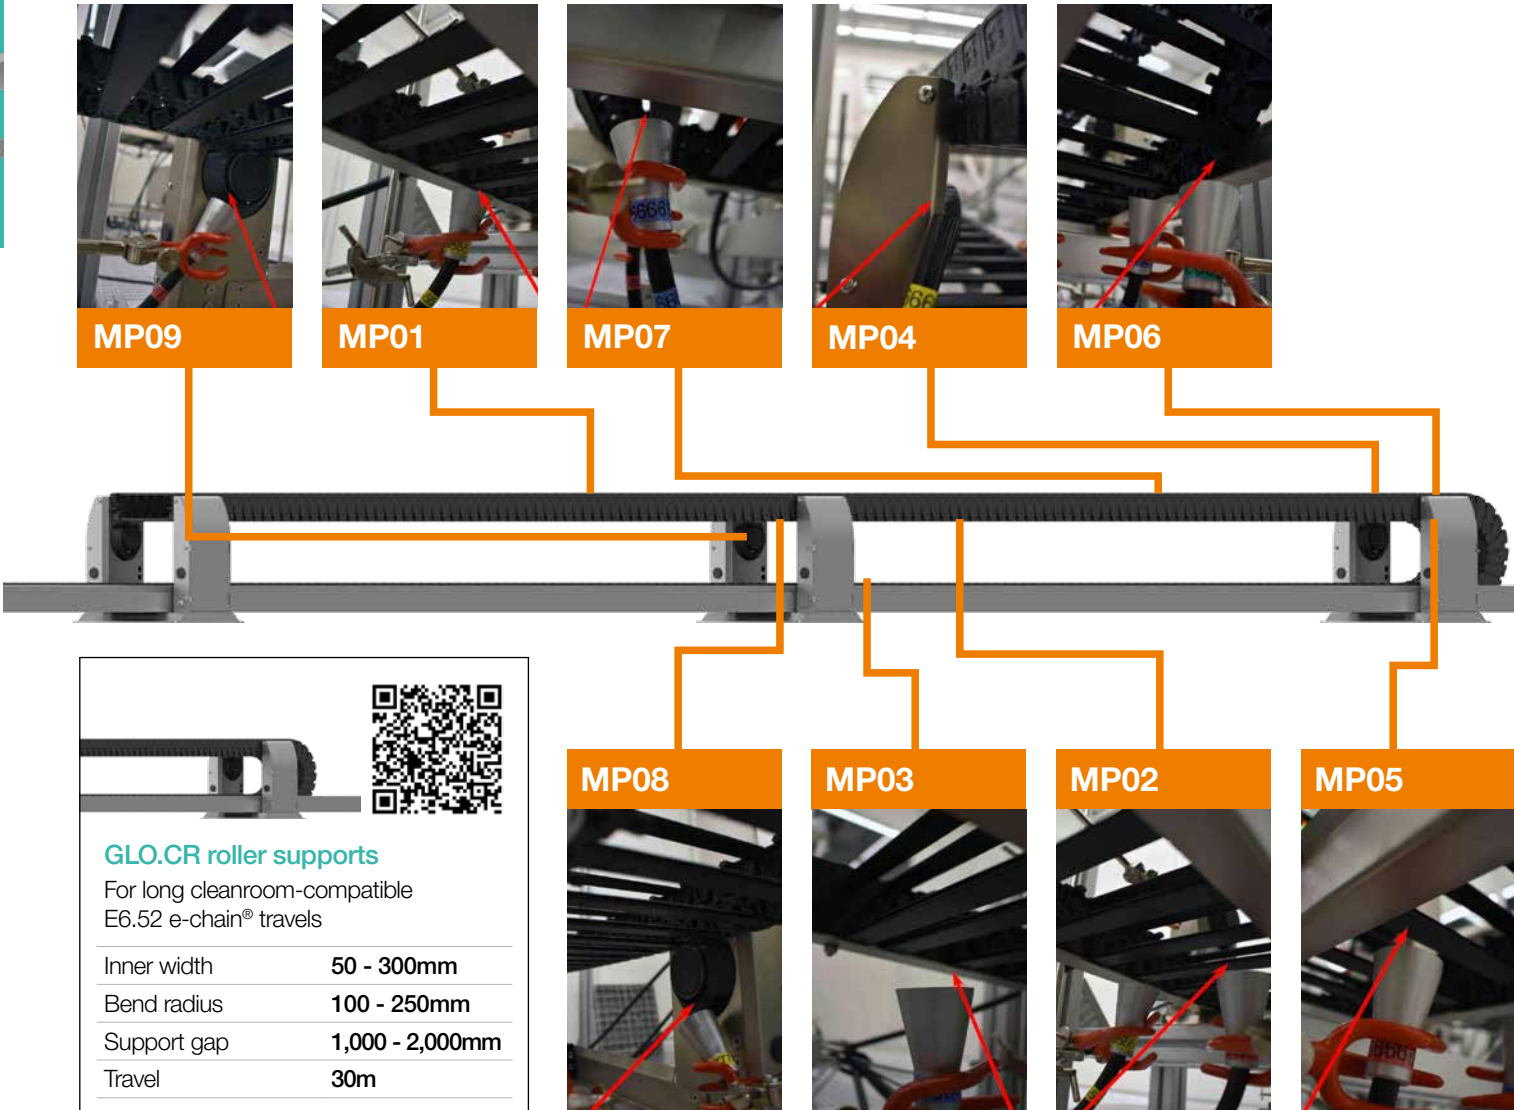

GLO.CR roller supports	
For long cleanroom-compatible E6.52 e-chain® travels	
Inner width	50 - 300mm
Bend radius	100 - 250mm
Support gap	1,000 - 2,000mm
Travel	30m

Parameter Set 1: Speed: $v1 = 0.5\text{m/s}$ Acceleration: $a1 = 1.0\text{m/s}^2$

Measuring point	MP01	MP02	MP03	MP04	MP05	MP06	MP07	MP08	MP09
Cleanroom class (according to ISO 14644-1)	2	4	1	4	4	1	2	2	3

Parameter Set 2: Speed: $v1 = 1.0\text{m/s}$ Acceleration: $a1 = 2.0\text{m/s}^2$


Measuring point	MP01	MP02	MP03	MP04	MP05	MP06	MP07	MP08	MP09
Cleanroom class (according to ISO 14644-1)	5	4	1	4	5	2	2	4	3

Parameter Set 3: Speed: $v1 = 2.0\text{m/s}$ Acceleration: $a1 = 4.0\text{m/s}^2$

Measuring point	MP01	MP02	MP03	MP04	MP05	MP06	MP07	MP08	MP09
Cleanroom class (according to ISO 14644-1)	4	4	3	4	5	5	5	4	4

Cleanroom guidelok horizontal, GLO.CR.56 with E6.52.175.100.0

For small cleanrooms

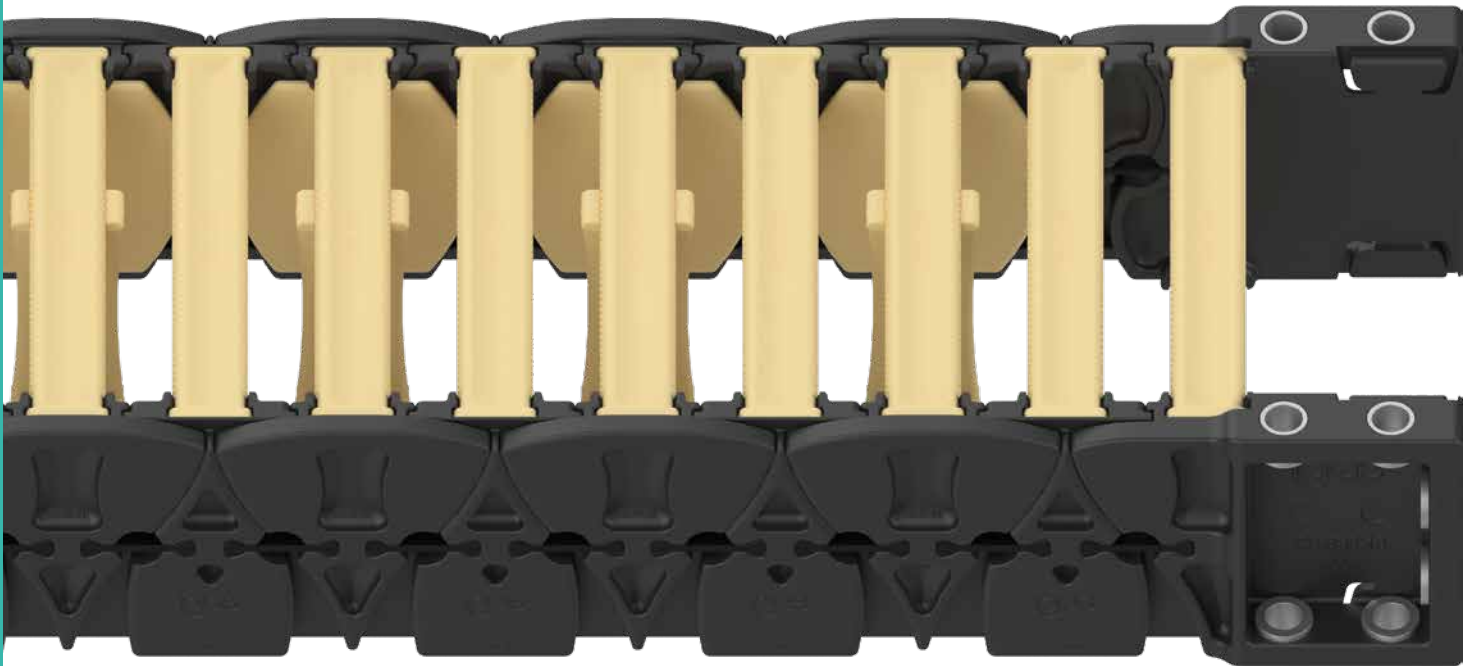

Optimised design now with reduced inner height

Addition to the successful C6 product range: clean e-chain for cleanroom applications of the future. Now with inner heights of 53mm and 29mm (new). Standard with crossbars and interior separation made of iglidur® J as an optimal gliding and friction partner for all cable jacket materials.

- ▲ Cleanroom-optimised design now with reduced inner height (other inner heights are being prepared)
- ▼ No static charge thanks to ESD side panels
- Tests in the internal igus® ISO 1 cleanroom laboratory
- No material contamination from particles
- ↔ Push-pull force monitoring

Expert interview Background of the C6 development



"Where did the idea of developing a new chain for cleanroom applications come from?"

Kira Weller: "We are a very dynamic company, so almost every week we look for new customer problems to solve. In the large and growing semiconductor market, and in battery production and microelectronics, our six-part energy chain series for cleanroom applications has already been very successful. Then there are our e-skin® and e-skin® flat products, which were developed specifically for this area. But requirements for individual applications are increasing, especially in the semiconductor industry, so we have very often offered special solutions."

"What were those special solutions?"

Weller: "Things like crossbars and separators made from our iglidur® J material, which reduces the abrasion from parts that come into contact with the cable, regardless of outer jacket material. We confirmed this result with many tests in our laboratory. Another special solution, one that customers often request, is electrostatically dissipative energy chains for use in ESD areas. We had already defined a standard product range for these areas, but most of the energy chains were not made for the highest cleanroom classes. So we developed a special solution made of ESD-compatible material for use with existing E6 chains. In a new

generation of the six-part energy chain, we decided to make this special solution standard. The C6 has side links made of electrostatically dissipative ESD material. Its crossbars, side plates, and separators are made of iglidur® J."

"Were there any other items that you took into account during development?"

Weller: "Yes, we wanted deepen our experience from the previous series. So we decided on the E6.1 series inner and outer link principle. The advantage is that the energy chain has a very straight run. We have also adopted the E6-series crossbar design, which simplifies installation and gives the E6 its quiet operation and very long service life. The crossbars are completely new; our main focus here is on cable-friendliness and simple, tool-free installation."

"Since 2020, igus® has had its own cleanroom laboratory certified by Fraunhofer IPA. How much does this help you develop cleanroom products, especially the C6?"

Weller: "Our cleanroom laboratory gave us important support. With every prototype change, we carried out particle tests directly and were able to identify and eliminate various particle sources. We can also take measurements over long periods of time and react quickly. The last change we made was to the number of crossbars



C6.29
Highest cleanroom suitability, hardly any abrasion & high strength

Inner width	29mm
Bend radius	100mm



C6.53
Highest cleanroom suitability, hardly any abrasion & high strength

Inner width	53mm
Bend radius	172mm

in the outer radius. We decided on one crossbar in each chain link to make the C6 torsion-proof. If the chain is not guided straight, there can be contact between the individual side links. Then it would no longer be safe to say that we do not generate any measurable particles, and given that cleanroom requirements may continue to increase, we decided on this extra security of doubling the number of crossbars."

Now the final question: What does C6 stand for?

Weller: "The C mainly stands for clean – for cleanroom-compatibility. 6 is the number of individual parts that make up an energy chain link. There are two side links, two crossbars, and two crossbars for a total of six. C6 also stands for the series name: Clean-chain."

Quiet, clean, fast, strong



Quiet operation at very high speeds

The E6.1 system is often the first choice when e-chains® are required for cleanrooms, extremely high dynamics, or low noise levels. Easy accessibility and high strength in this category specialise the E6.1 family for very demanding tasks.

- ▲ Extremely quiet operation thanks to the inner/outer-link design
- ▼ Less weight at the same inner height and unsupported length
- Cleanroom ISO 1 certification from the IPA Fraunhofer Institute
- chainge® standard material
- 🔗 Push-pull force monitoring

E6.1 e-chain system®

High dynamics, quiet, lighter, easier to open



The interior of the E6.1 has been designed to be extremely cable-friendly to increase the service life of cables and hoses even more. The crossbars are very smooth and rounded as is the transition from e-chain® link to crossbar, and all markings have been moved outside of the e-chain® cross section.

Dynamic, quiet, light and cleanroom suitable - E6.1

The E6.1 series is a development of the E6 series. It incorporates all the advantages of the E6 such as strength, cleanroom-compatibility and low weight in addition to even quieter operation at higher maximum speeds. In addition, its accessibility to the interior and the assembly and handling have been improved.

igus® for cleanrooms – Suitability of the igus® E6.1 e-chains®

A special material reduces the already low e-chain® abrasion much further. In many applications where cumbersome special solutions are required, an e-chain® can thus be used. IPA tests confirm that standard e-chains® from igus® meet cleanroom requirements and have been "tested and found very good". e-chains® for cleanroom applications demand very high wear resistance of moving parts. e-chains®, for example, must be wear-resistant, in order to meet the normal requirements for such a sensitive environment.

Benefits

- Quiet - from a noise level of 32dB(A)
- About 30% lower weight than the E6 system
- Highly dynamic
- Extremely low vibration
- Cleanroom-compatible due to low-abrasion connector system, no pin and bores necessary

Typical application areas

- Semiconductor industry
- Studio technology and camera movements
- Printer/plotter industry
- For extremely high-acceleration applications

Attachment from any side: with KMA mounting brackets

Quiet from 32dB(A): small pitch for quiet, smooth running

Fast assembly: crossbars removable along the inner and outer radius

Dynamic: high speeds and accelerations

Long service life: low vibration, high tensile strength

IPA cleanroom Class 1: virtually no wear or abrasion

Modular design: can be easily lengthened and shortened

Series E61.29 special feature: crossbar openable along inner and outer radius, from both sides

Extremely low noise, vibration and abrasion, cleanroom suitable

E6.1 e-chain system®

E6.1 e-chain®



E61.35

Crossbars removable along the inner and outer radius

Inner width	30 - 140mm
Inner height	35mm



E61.62

Crossbars removable along the inner and outer radius

Inner width	50 - 400mm
Inner height	62mm



E61.29

Openable along inner and outer radius, from both sides

Inner width	30 - 140mm
Inner height	29mm



E61.40

Crossbars removable along the inner and outer radius

Inner width	40 - 300mm
Inner height	40mm



E61.80

Crossbars removable along the inner and outer radius

Inner width	50 - 600mm
Inner height	80mm



EF61.29

Crossbars removable along the inner and outer radius

Inner width	30 - 140mm
Inner height	29mm



E61.52

Crossbars removable along the inner and outer radius

Inner width	40 - 300mm
Inner height	52mm

e-chain® service life calculator

Simple calculation

Calculate service life of energy chains

Calculate the service life of our e-chains® and get a 36-month guarantee certificate



e-chain® selection

E6.29.050.100.0

Inner width: 50 mm Bend radius: 100 mm

Application parameters

Movement type: ☒ Unsupported ☐ Gliding

Installation type: ☒ Supported lower run ☐ Unsupported lower run ☐ On inclined plane

Travel: 2000 mm Fill weight: 1,5 kg/m Speed: 2 m/s

Environmental conditions: Temperature: 20 °C Dirt: ☒ None ☐ Mechanic

☐ I accept the igus® disclaimer (Mandatory field)

Calculate

Service life

Part number: E6.29.050.100.0

Parameters	Service life	64.40 EUR/m
Installation type: Supported lower run (standard) Inner height: 29 mm Inner width: 50 mm Outer height: 35 mm Outer width: 66 mm Bend radius: 100 mm	96,277,000 Double strokes (guaranteed) amounts to a total distance of 385,108 km (guaranteed)	Request guarantee Save information View product details

Alternative chains

Part number	Inner height [mm]	Inner width [mm]	Outer height [mm]	Outer width [mm]	Bend radius [mm]	Price [EUR/m]	Service life [Double strokes]
R6.29.050.100.0	28	50	35	66	100	117.30	83,984,000
E61.29.050.100.0	29	50	35	64	100	59.80	72,195,000
E4.28.050.100.0	28	50	42	70	100	52.58	32,523,000
E4.32.05.100.0	32	50	54	73	100	60.66	32,523,000
R4.28.050.100.0	28	50	42	70	100	74.58	32,523,000
E4.31L.050.100.0	31	50	42	64	100	47.74	31,710,000
H4.32.05.100.0	32	50	54	73	100	55.26	31,710,000
R4.31L.050.100.0	31	50	42	64	100	70.40	31,710,000


The calculated service life in double strokes is guaranteed for four years*

Our service life calculator gives you the energy chain's expected service life when you enter a few application parameters. You can also use the tool to create a guarantee certificate for up to four years (*the guarantee applies to the calculated service life, and not longer than four years).

igus.eu/
service-life-calculator



Compact and modular: e-skin® flat with CFCLEAN cables

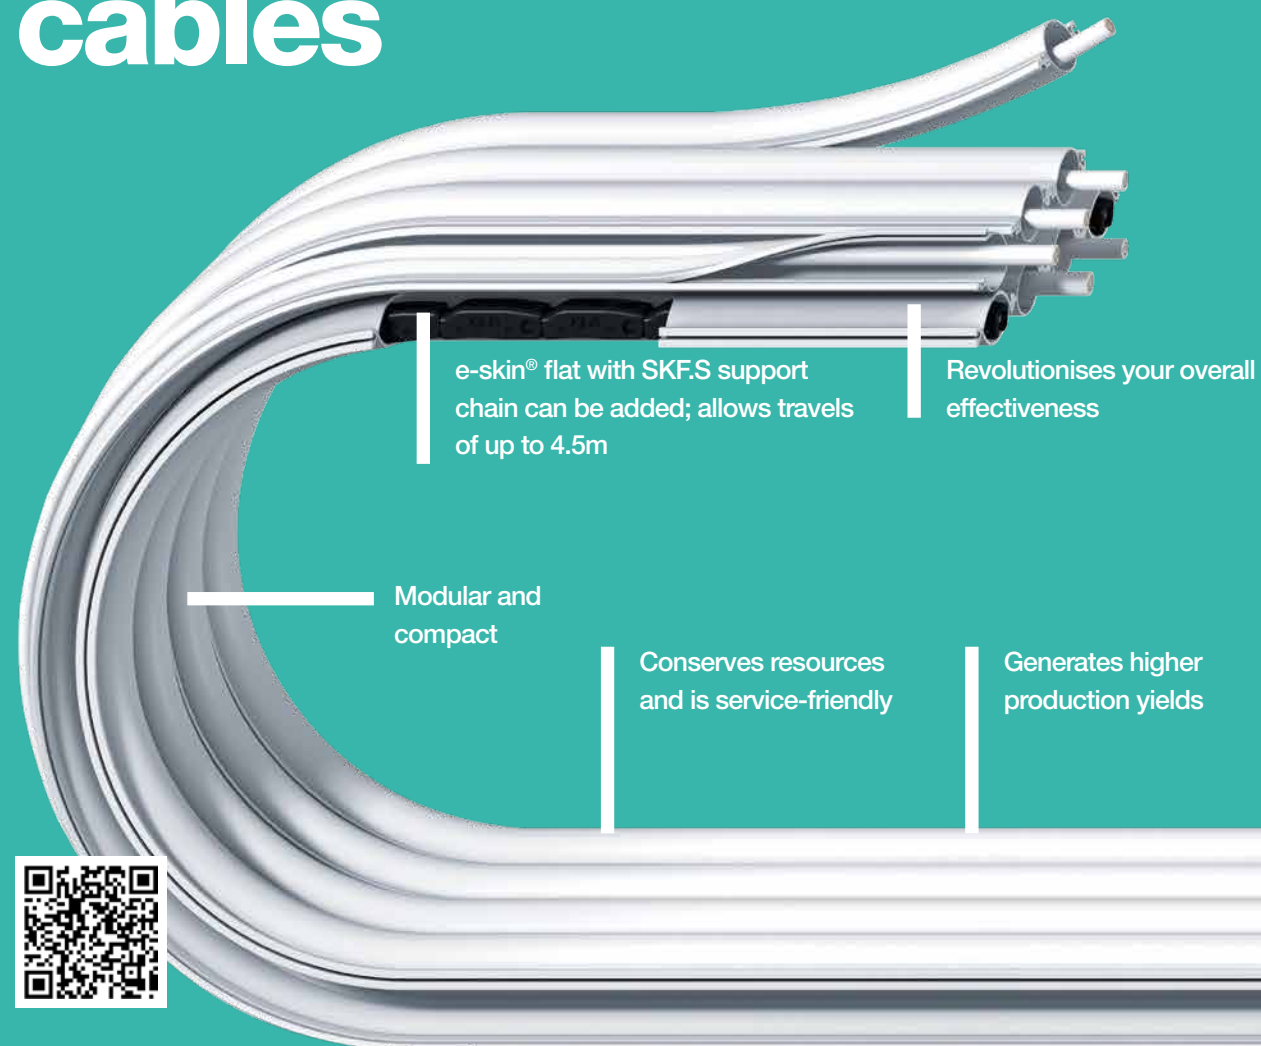

igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Protected by highly abrasion-resistant heat-sealed film

Made for the e-skin® flat

Has no outer jacket, so it is thin and lightweight

Guaranteed service life of 40 million double strokes

Great flexural strength thanks to very finely stranded special conductors

CFCLEAN CONTROL

CFCLEAN BUS

CFCLEAN DATA

CFCLEAN MOTOR

Revolutionises your overall effectiveness

e-skin® flat

The main advantage of the e-skin® flat is its modularity and easy maintenance. In contrast to commercially available solutions with firmly defined flat ribbon cables with welded stranded elements, the e-skin® flat energy chain system offers openable chamber systems. Flexible chainflex® CFCLEAN stranded elements (with or without connectors), support chains, hoses, etc., can now be replaced or added in just a few minutes.

- Highly efficient in the prototype phase
- Maximum availability due to easy replacement of defective elements
- Resource-efficient, as only individual elements are replaced when there is damage

igus.eu/e-skin-flat



Commercially available ribbon cables with permanently integrated cable elements: the entire system must be replaced if there is damage.

... made for the e-skin® flat

chainflex® CFCLEAN

The e-skin® flat cable guide system combined with chainflex® CFCLEAN cables represents the systematic refinement of conventional PTFE trackless cables for cable guidance in flat-panel displays (FPDs) and semiconductor, microelectronic component production, and medical technology. The strengths of the PTFE ribbon cable have been enhanced and the weaknesses eliminated. The new e-skin® flat cable guide system is the result of this refinement.


- Stiff cable jackets prevent system bending
- Low reset forces thanks to highly flexible stranded structure ... special conductors ... no outer jacket
- CFCLEAN chainflex® adapted to the application with up to 21% less weight than conventional cables

- About 16% smaller diameter than standard cables with jacket
- No minimum length
- Conductor prototypes: finished in 48-72 hours
- All standard core/cross section combinations: data, bus, control, motor – available from stock, with a guarantee of up to 4 years

igus.eu/cfclean

e-skin® flat

Modular, flexible, and quiet

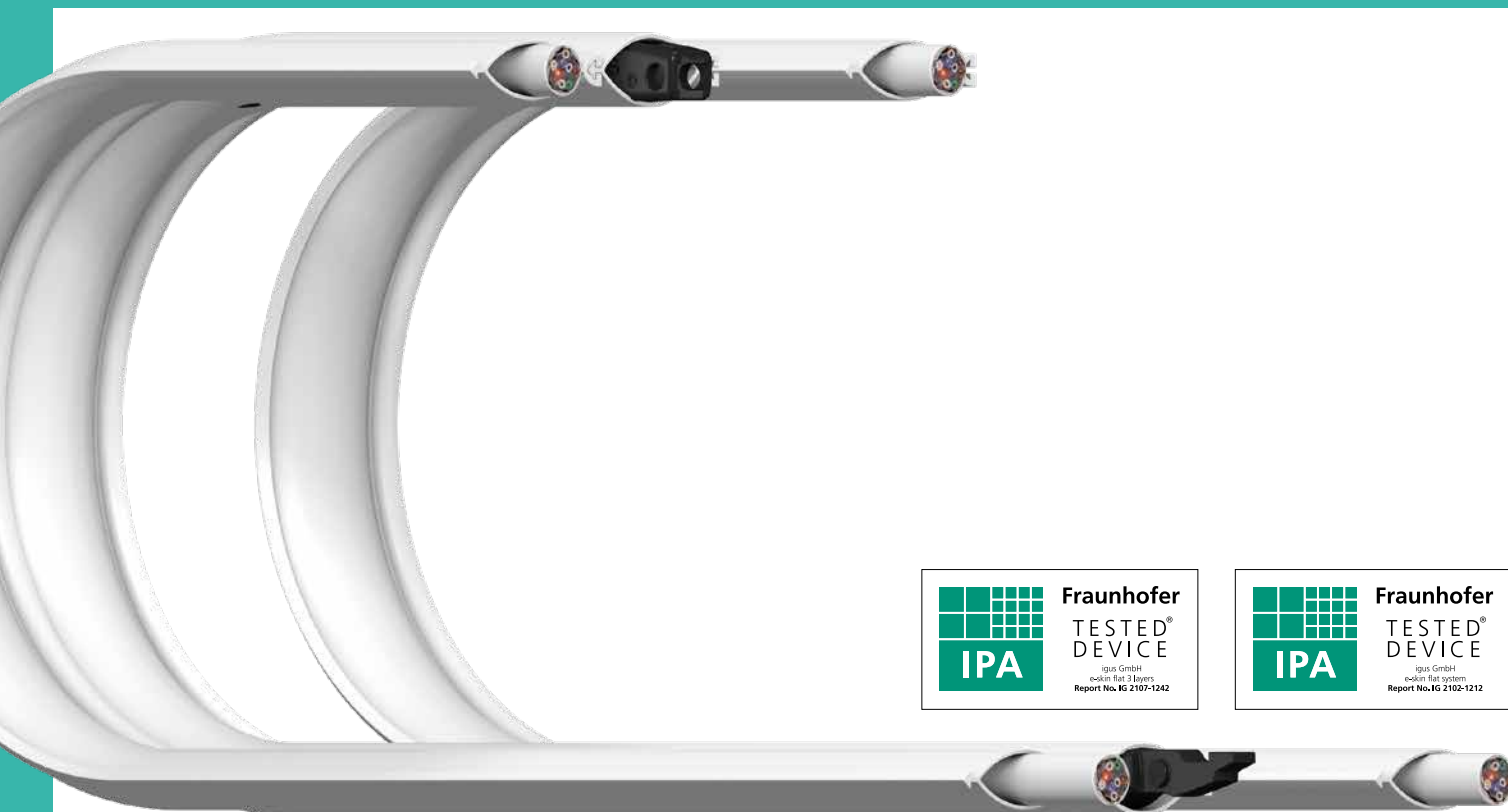

Modular principle for ISO Class 1 applications

The main advantage of the e-skin® flat is its modularity and easy maintenance. Unlike commercially available solutions with defined flat ribbon cables with welded stranded elements, the e-skin® flat energy chain system offers openable chamber systems. Flexible chainflex® CFCLEAN stranded elements (with or without connectors), support chains, hoses etc. can now be replaced or added in just a few minutes.

- ▲ Single pods can be freely configured in different layers
- ▼ Openable for quick installation
- Fraunhofer IPA ISO 1 certificate, one and three layers
- Individual single pods can be replaced without replacing the entire system

SKF profiles

Modular and compact design



Weiss GmbH is specialised in the development and manufacture of components for automation technology and a leader in the field of rotary indexing tables and wanted to find a cable feed-through up to the middle of a tool that could hold two sensor cables and two hoses, each with a diameter of four millimetres. The solution: the clean e-skin® flat ribbon cable from igus®. Service life over 57 million double strokes.

Connectable profiles - e-skin® flat SKF

The cable guides for automation systems and robots in the manufacture of displays, semiconductors, and microelectronic components have to meet special particle-free requirements. In contrast to commercially available solutions using fixed flat ribbon cables

with cables permanently welded inside, the e-skin® flat energy supply system offers an openable chamber design. Flexible braided cable elements (with or without connectors), e-skin® flat with support chains, hoses and so on, can now be changed or added in a few minutes.

Benefits

- Revolutionises your overall effectiveness
- Generates higher production yields
- Suitable for cleanrooms according to IPA Cleanroom Class 1
- Openable or enclosed
- Modular, freely expandable and compact

Typical application areas

- Cleanroom applications with compact installation spaces
- Short travels
- Display and semiconductor production
- LCD/LED panel production

IPA cleanroom Class 1:
virtually no wear
or abrasion

Modular structure:
extendable by connecting
additional profiles

Optional support e-chain®:
SKF12C series for
unsupported length and a
defined bend radius


Mounting brackets:
stackable and variable width
with integrated strain relief

SKF.C fully enclosed:
prevent particle ingress
with closed cable
chambers version

Flexible:
can be shortened
or widened

Revolutionise efficiency
of the entire plant:
specially matched chainflex®
CFCLEAN braided structure

Next-level modularity

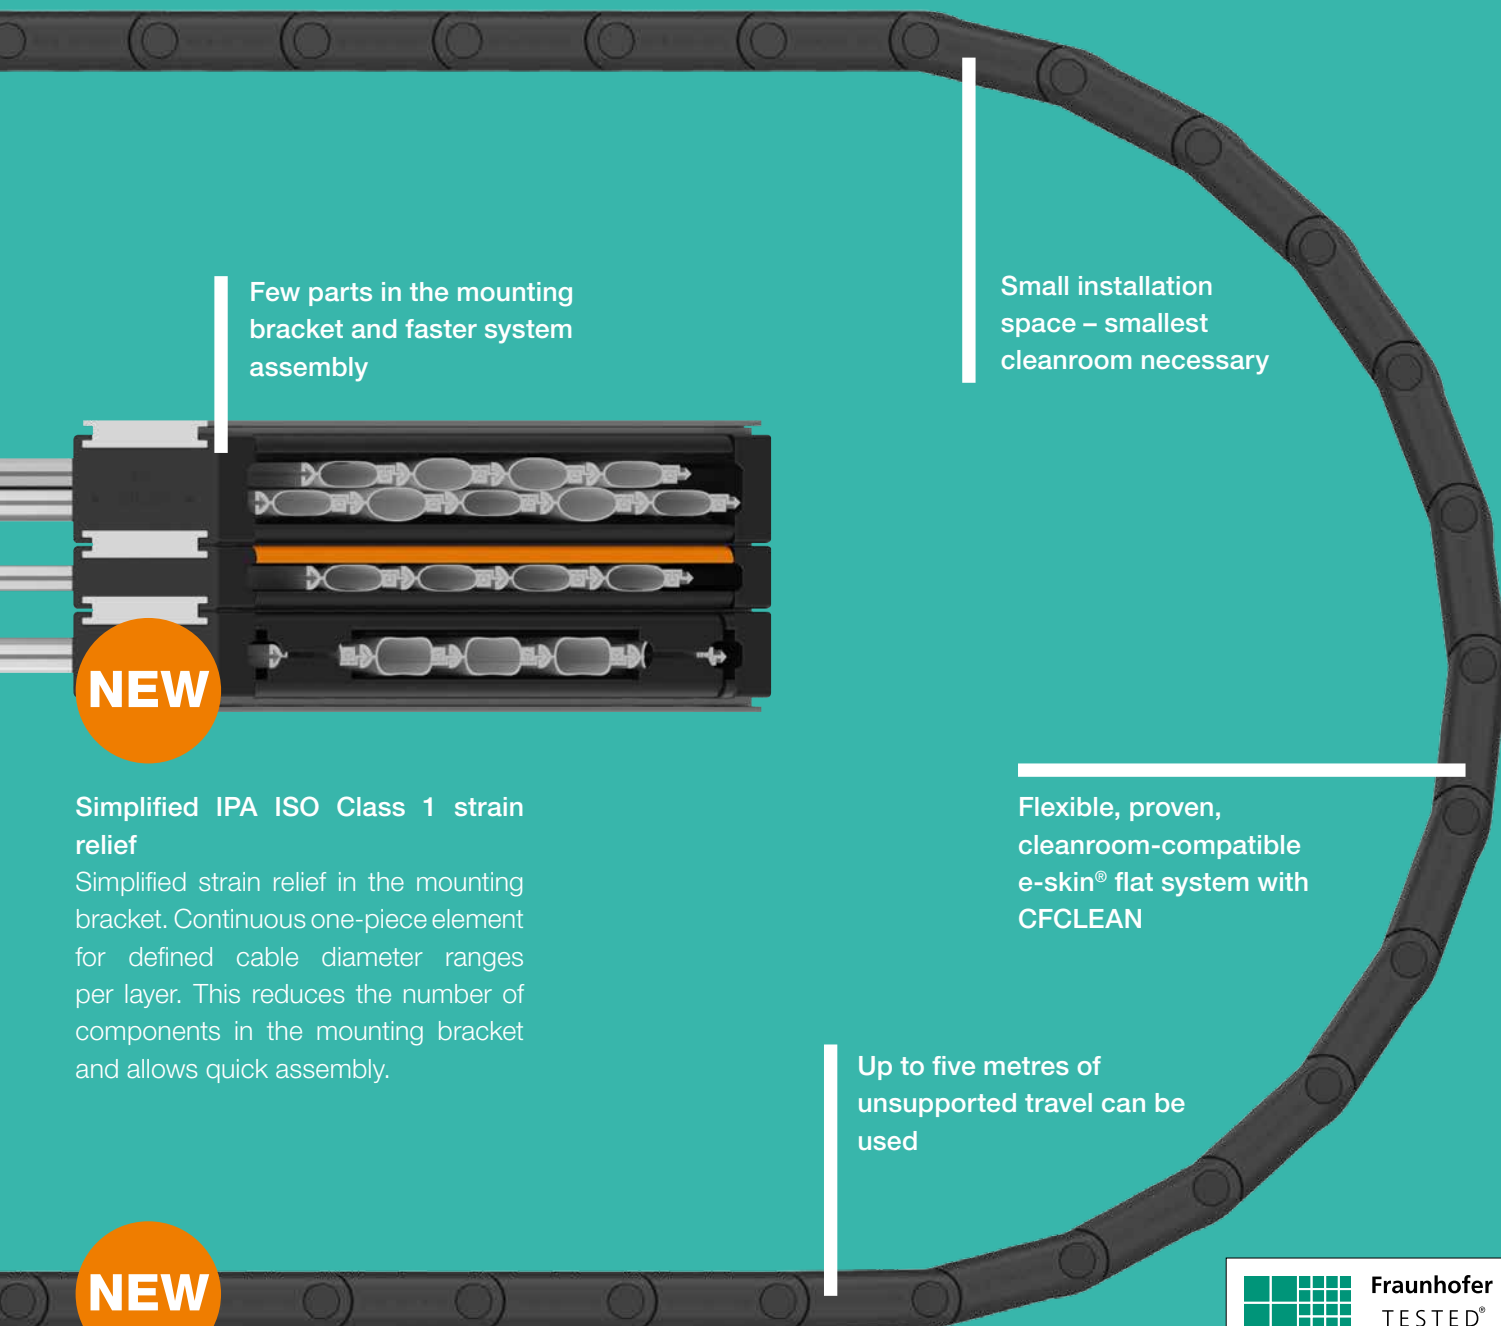

Few parts in the mounting bracket and faster system assembly

Small installation space – smallest cleanroom necessary

NEW

Simplified IPA ISO Class 1 strain relief

Simplified strain relief in the mounting bracket. Continuous one-piece element for defined cable diameter ranges per layer. This reduces the number of components in the mounting bracket and allows quick assembly.

Flexible, proven, cleanroom-compatible e-skin® flat system with CFCLEAN

Up to five metres of unsupported travel can be used

NEW

Up to 4.5m travel with the e-skin® flat IPA ISO Class 1

The new support chain allows for longer travels with the cleanroom-optimised e-skin® flat system.

The new larger support chain is guided in the e-skin® flat POD SKF15C and can be integrated into the existing connection element structure.



e-skin® flat in the first industry test of its kind

Highest cleanroom class after 60 million double strokes

Cleanroom-compatible energy chains from the e-skin® flat series still meet the highest Cleanroom Class even after 1.5 years of continuous use and 60 million double strokes. This result came from a test that is unprecedented in the industry. It was performed in a cleanroom laboratory set up by igus® in Cologne in cooperation with the Fraunhofer Institute for Manufacturing Engineering and Automation IPA, igus® development and certification partner for more than 17 years.

"The e-skin® flat cleanroom energy chain is ideal for robots and other automation systems in electronics production in areas such as semiconductors and display production," says Andreas Hermey, Development Manager for e-chain systems® at igus®. "It is so abrasion-resistant that contamination by airborne particles is no longer an issue." Until now, however, the intensity of the high-performance plastic's particle

abrasion after long, intensive use has been unclear. To determine its details, igus® launched a test setup that is unique in the industry so far. Part one of the experiment was conducted in igus's own laboratory. The energy chain moved in an environment with normal levels of dust and dirt for around 1.5 years, during which it performed 60 million double strokes. Part two of the test took place in the cleanroom laboratory. The core is made up by three so-called laminar flow boxes with high-performance filters, which allow for tests in uncontaminated air.

The worn-out e-chain® was in motion three times for 100 minutes at different speeds. Sensors detected particle concentration in the surrounding air. "Even after 60 million double

strokes, our e-skin® flat e-chain® still qualified for the highest cleanroom class," says Hermey. "This finding gives cleanroom production facility operators additional confidence."



Kira Weller, e-chain® product manager (left); Dominik Barten, development engineer (middle); and Andreas Hermey, head of e-chain® research and development (right) explain what is special about these research opportunities



e-skin® flat

e-skin® flat



e-skin® flat SKF15C
Prevent particle ingress with closed cable chambers

Outer height	16mm
Inner height	15mm



e-skin® flat SKF12C
Prevent particle ingress with closed cable chambers

Outer height	13mm
Inner height	12mm



e-skin® flat SKF120
Easy to fill due to a special locking mechanism

Outer height	13mm
Inner height	12mm




SKF.S support e-chain®
Can be combined with SKF12C series for unsupported length and a defined bend radius

Outer height	8mm
Inner height	8mm

e-skin® flat configurator

Simple calculation

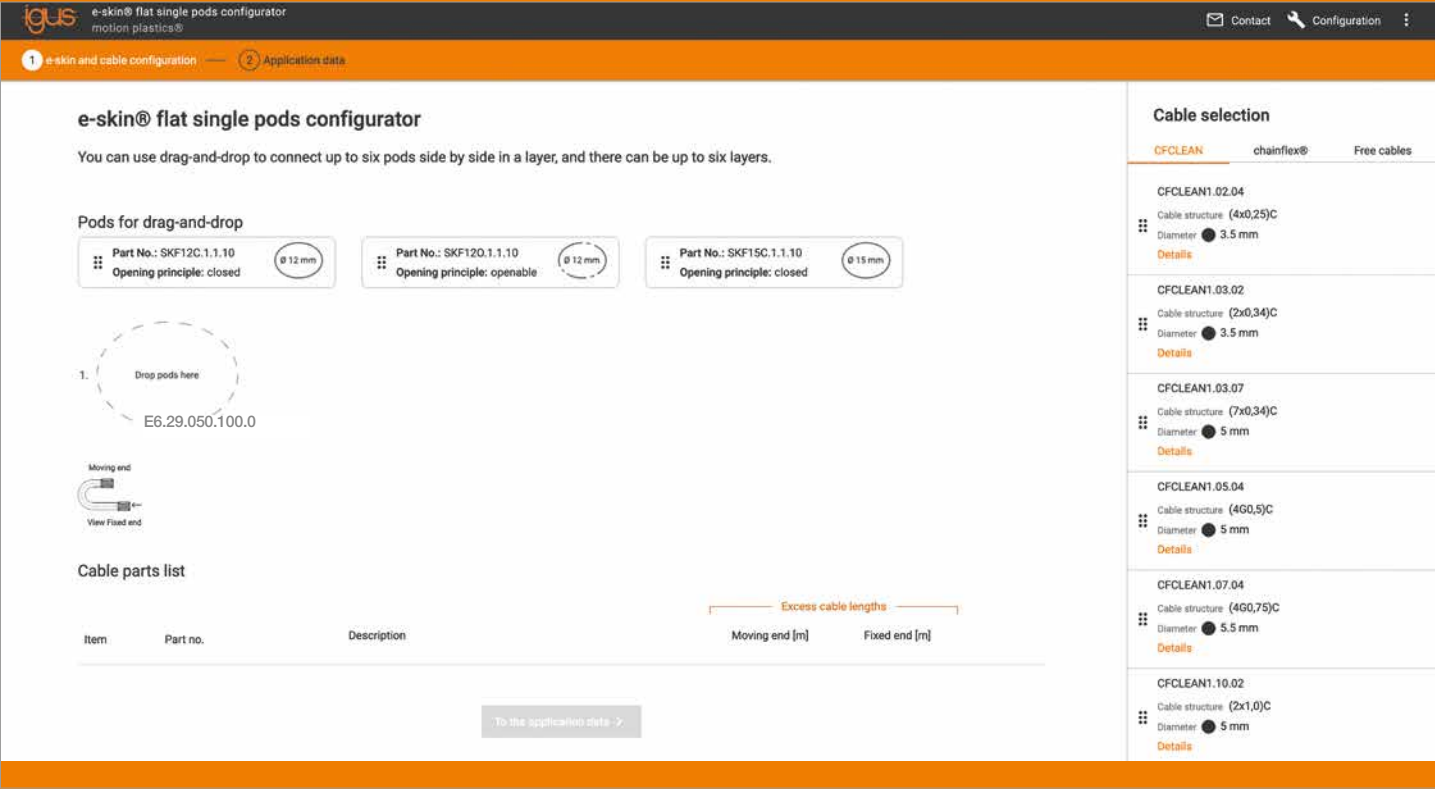

Get an e-skin® flat cable guidance system for cleanroom applications in just three steps

Our e-skin® flat online configurator lets you use drag-and-drop to quickly assemble your own ribbon cable and the cables it contains.

- 1 Open the e-skin® flat configurator.
- 2 Select pods and connect them, then select cables
- 3 Enter basic parameters and send your query

igus.eu/
skf-configurator



40 million double strokes guaranteed

CFCLEAN CONTROL



CFCLEAN BUS



CFCLEAN DATA



CFCLEAN MOTOR



Highly flexible and extremely variable in the cleanroom

Developed for use with the e-skin® flat, the CFCLEAN cable elements can be used very flexibly and replaced quickly. Omitting the outer jacket makes them 39% thinner and 43% lighter. All industry-standard core/cross-section combinations (data, bus, control, motor) are available from stock, with a guarantee of up to four years (40 million double strokes guaranteed at 70mm bend radius).

- ▲ Extremely bend-resistant, therefore very low reset forces
- ▼ Flexible and cost-effective thanks to cable elements that can be replaced in seconds
- Test 5497: Interim status: 130 million strokes (test continues successfully)
- Very thin (16% smaller diameter) and light (21% lower weight, thus significant reduction in installation space)
- 🔗 Configure and request CFCLEAN with e-skin® flat in just a few steps

Modular principle for ISO Class 1 applications

CFCLEAN

CFCLEAN Elements

CFCLEAN1

Control elements

- For extremely heavy duty applications
- PTFE Film Taped
- Highly abrasion-resistant

Bend radius e-skin® flat	70mm
Temperature e-skin® flat	-10 °C/+80 °C
Double strokes guaranteed	40,000,000



CFCLEAN Coax elements

CFCLEAN2

Coax elements

- For extremely heavy duty applications
- PTFE Film Taped
- Highly abrasion-resistant

Bend radius e-skin® flat	70mm
Temperature e-skin® flat	-10 °C/+80 °C
Double strokes guaranteed	40,000,000



CFCLEAN Data elements

CFCLEAN3

Data elements

- For extremely heavy-duty applications
- PTFE Film Taped
- Highly abrasion-resistant

Bend radius e-skin® flat	70mm
Temperature e-skin® flat	-10 °C/+80 °C
Double strokes guaranteed	40,000,000



CFCLEAN Measuring system elements

CFCLEAN4

Measuring system elements

- For extremely heavy duty applications
- PTFE Film Taped
- Highly abrasion-resistant

Bend radius e-skin® flat	70mm
Temperature e-skin® flat	-10 °C/+80 °C
Double strokes guaranteed	40,000,000



CFCLEAN Motor elements

CFCLEAN7

Motor elements

- For extremely heavy duty applications
- PTFE Film Taped
- Highly abrasion-resistant

Bend radius e-skin® flat	70mm
Temperature e-skin® flat	-10 °C/+80 °C
Double strokes guaranteed	40,000,000



CFCLEAN Bus elements

CFCLEAN8

Bus elements

- For extremely heavy duty applications
- PTFE Film Taped
- Highly abrasion-resistant

Bend radius e-skin® flat	70mm
Temperature e-skin® flat	-10 °C/+80 °C
Double strokes guaranteed	40,000,000



For ESD-sensitive cleanroom parts



Dissipative for cleanrooms

New black e-skin® flat in size SKF12 in openable and fully closed variants. Conductivity prevents electrostatic fields and abrupt discharges caused by e-skin® flat movement.

- ▲ No further shielding of ESD-sensitive parts necessary
- ▼ All e-skin® flat accessories can be used, including CFCLEAN
- Tests in the internal igus® ISO 1 cleanroom laboratory
- Small installation space – smallest cleanroom necessary Configure e-skin® flat energy supply systems online

For the highest level of safety and cleanliness in cleanrooms

Cologne, 13 September 2023 - igus® has added an ESD variant specifically for highly sensitive cleanrooms to its e-skin® flat series. The modular ribbon cable's new material prevents the chain from becoming electrostatically charged while ensuring that it generates no particles, even during very fast movements. The modular design with individual pods also allows quick energy supply system filling.

In addition to particle-free cleanrooms, electronics and semiconductor industry production requires electrostatically dissipative machine components. Even the smallest current surge from electrostatic charge can easily destroy the product. So igus® has added an ESD variant to its e-skin® flat series. The new black e-skin® flat is made of an electrostatically dissipative material. "The new material combines ESD approval, which is frequently required, with the e-skin® flat's proven low particle emissions. The chain produces almost no particles and dissipates electronic charges directly", says Kira Weller, e-chain® product manager at igus®. "The new e-skin® flat ESD gives us just the product our customers need to produce sensitive electronic components." The ribbon cable is used by such companies as Weiss, an automation specialist, in its high-speed HP70 pick & place unit, which is used in such applications as material handling in the medical and pharmaceutical industries. Weiss is enthusiastic about the advantages of

the e-skin® flat ESD. The igus® ribbon cable is much stronger and quieter and less susceptible to wear in quick movement than are classic corrugated hoses. The e-skin® flat also features a modular design, unlike laminated ribbon cables made of polytetrafluoroethylene (PTFE). In the igus® in-house cleanroom laboratory, developed with the Fraunhofer Institute, the new e-skin® flat has already proven itself in the highest cleanroom class.

Easy cable replacement

"Single pod" profiles ensure quick, easy e-skin® flat installation, so the energy supply system can be easily expanded. A zip-lock system allows easy cable replacement. "This is a big advantage over the widely-used PTFE ribbon cables, in which the stranded cores are welded in a continuous ribbon and cannot be separated. If a single core breaks, the entire system must be replaced. That takes time and money," says Weller. "For our e-skin® flat, we offer the CFCLEAN cable cores for transmitting energy, motor control, bus, and Ethernet signals. The user gets a ready-to-connect energy supply system directly from a single source." If long travels (up to five metres) are needed, a support chain can be integrated easily into the pods. Spacers, mounting brackets from the e-skin® flat series, and the smart i.Cee EC.S ultrasonic condition monitoring sensor are also compatible with the new ESD chain.



*e-skin® flat with support chain for unsupported length and a defined bend radius optionally available (only in connection with SKF12C)

Predictive maintenance



Condition-based maintenance reports in the cleanroom

New ultrasonic sensor for the e-skin® flat system allows for condition-based maintenance reporting in the cleanroom.

- ▲ Maximum e-skin® service life extension
- ▼ Maintenance cost reduction thanks to predictive maintenance recommendations
- Tested in the igus® cleanroom laboratory, suitable for cleanrooms up to Air Purity Class 1 according to ISO 14644-1
- Use cleanroom components to their latest possible end of life without premature replacement

"Clean" world first: i.Cee EC.S



Elimination of unplanned downtime caused by failure or breakage of OEM cables



Highest cleanroom classification of the energy supply

The IPA Fraunhofer Institute's
REINER! Purity Technology Prize.
Second place for the igus® e-skin®
flat and CFCLEAN

In this cleanroom highlight, smart ultrasonic sensor technology is used to continuously monitor the current sag of the e-skin® flat system. The support chain SKF.S is equipped with a defined bend radius and

therefore allows for unsupported lengths in cleanrooms. As soon as a critical condition of the energy supply system can be detected, predictive-maintenance recommendations are issued.


Benefits:

- Increased cleanroom overall equipment effectiveness (OEE)
- Easy integration into comprehensive machine network/IoT environment - no system downtimes thanks to condition-based alarm messages
- No unnecessary storage costs for expensive cleanroom materials
- Tested in the igus® cleanroom laboratory, suitable for cleanrooms up to Air Purity Class 1 according to ISO 14644-1
- Over 100 successful i.Cee predictive-maintenance projects in the field
- Use cleanroom components to their latest possible end of life without premature replacement
- Avoid resource-intensive emergency operations



Predictive maintenance with igus® smart plastics
Prevent downtime ...
extend product service life ...
save maintenance costs ...
with smart plastics

Highest cleanroom class

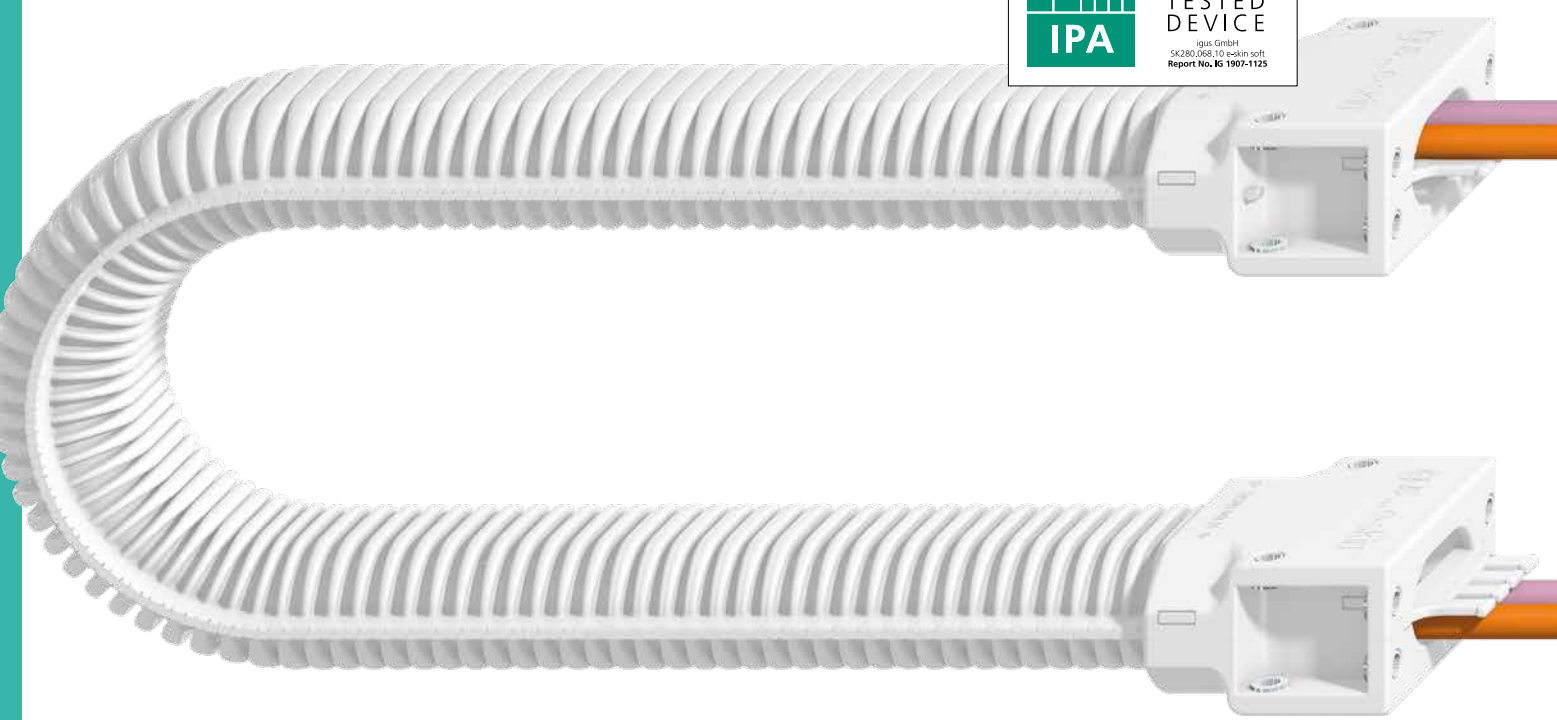

e-skin® corrugated tube cleanroom energy supply

The e-skin® is a hose consisting of an upper and lower shell that form a sealed tube when connected to each other. It is made of the igumid® SK polymer material developed specifically for this purpose. The simple reclosable opening mechanism allows easy maintenance and inspection of the installed cables. Operating temperature is +10°C/+50°C. The e-skin® has many advantages over conventional corrugated tubes and is available in three different versions.

- ▲ Self-supporting corrugated tube upper shell function for unsupported applications
- ▼ Small installation space thanks to the e-skin® soft's flexible material
- All variants (SK, SKS, and SKY) certified ISO Class 1 by Fraunhofer IPA
- No cleanroom contamination from production part particles

e-skin® corrugated tube for cleanrooms

Why the e-skin corrugated tube?

Typical application areas

- Cleanroom
- Fast, short, unsupported applications
- Hanging and standing applications
- Display and semiconductor production
- Pick & place applications
- Printers
- Medical technology
- All machines that use corrugated tubes



- 1 Cleanroom ISO class 1**
Virtually no wear or abrasion
- 2 Two-piece corrugated tube**
Consisting of upper and lower shell
- 3 Attachment from any side**
KMA mounting bracket, with optional strain relief
- 4 Oval geometry:**
Prevents unintentional lateral movement
- 5 Fully enclosed:**
Protection against dust and water ingress
- 6 Reclosable opening mechanism**
Opening and closing with zipper function
- 7 Optional, vertical separation**
Consisting of individual separators and full-width shelves
- 8 Minimisation of abrasion**
With the new inner separation made of tribo-optimised iglidur material, the wear can be reduced by up to 80%

Attachment from any side:
KMA mounting brackets with strain relief

Two-piece corrugated tube:
consisting of upper and lower shell

IPA cleanroom Class 1:
virtually no wear or abrasion

Reclosable opening mechanism:
easy opening and closing with "zipper" function

Fully enclosed:
protection against dust and water ingress

Space-saving:
less installation space required

Cable-friendly:
with defined minimum bend radius

Strong:
prevents unintentional sideways movement

3 versions available:
e-skin® SK, SKS and SKY

Application example

e-skin® cleanroom chain in camera module adhesive dispenser



Mingseal uses our e-skin® corrugated tube in its camera module adhesive dispenser. It combines the engineers' openability, inherent rigidity, and compactness requirements with the highest cleanroom suitability according to ISO Class 1.

Customer requirements:

Mingseal manufactures products for the 3C industry (Computer, Communication and Consumer Electronic). The main product is an adhesive dispenser for camera modules.

igus® E3 and E6 e-chains®, which are already suitable for ISO class 1 according to IPA, were previously used as energy supply systems. Nowadays, however, the market demands an even higher particle-free standard (and thus theoretically an even better ISO class) than before, especially for mobile phone camera modules.

The reason for this is the ever-increasing pixel counts of mobile phone cameras, because if there is just one particle on these modules, the entire module is abandoned and the overall equipment effectiveness (OEE) as well as the yield of the plant drop enormously.

igus® solutions:

In the first step, the customer had to replace the energy chain with other products such as welded cleanroom ribbon cables. The disadvantages of this solution soon became apparent: on the one hand, it was not possible to open the welded ribbon cables to add or replace cables, and on the other hand, the cables broke very quickly because they had to support themselves. After only half a year, the first defects appeared on these welded cables, which in turn led to the system coming to a standstill.

The igus® e-skin® cleanroom energy supply system won over the Mingseal engineers. The unique openable corrugated tube for cleanrooms, which consists of an upper and lower shell, combined the engineers' openability, inherent rigidity, and compactness requirements with the highest cleanroom suitability according to ISO Class 1. In future, the compact e-skin® SKS20 series will be installed in new machines.

igus.eu/adhesive-dispenser



Safe and abrasion-resistant guidance of cables in cleanrooms

e-skin® corrugated tube energy supply system

e-skin®
SK

SK 28
Two-piece corrugated tube for long unsupported lengths

Inner width	68mm
Inner height	28mm

SK 40
Two-piece corrugated tube for long unsupported lengths

Inner width	85mm
Inner height	38mm

e-skin®
soft SKS

SKS20
Two-piece corrugated tube with more elastic material and lower clearance height

Inner width	33mm
Inner height	20mm

SKS24
Two-piece corrugated tube with more elastic material and lower clearance height

Inner width	48mm
Inner height	24mm

SKS28
Two-piece corrugated tube with more elastic material and lower clearance height

Inner width	68mm
Inner height	28mm

SKS40
Two-piece corrugated tube with more elastic material and lower clearance height

Inner width	85mm
Inner height	38mm

e-skin®
hybrid SKY

SKY28
Two-piece corrugated tube combines the advantages of e-skin® SK and e-skin® soft SKS

Inner width	68mm
Inner height	28mm

SKY40
Two-piece corrugated tube combines the advantages of e-skin® SK and e-skin® soft SKS

Inner width	85mm
Inner height	38mm

Clean SCARA Cable Solution



SCARA applications, IPA ISO Class 2

Based on the experience of the SCARA Cable Solution developed in 2020, a certified cleanroom variant is now available: the Clean SCARA Cable Solution. The optimised rotating mount connections allow up to ISO Class 2 (IPA-certified). In combination with the e-skin® design SKS20, which has been tried and tested in the highest cleanroom class, highly dynamic applications can also be implemented. The SKS20's proven zipper opening principle allows quick, easy cable filling. The new Clean SCARA Cable Solution is available in all known connections of the standard SCARA Cable Solution.

- ▲ Safe guidance of cables and hoses in cleanrooms, easy to retrofit
- ▼ High running performance and reduced downtime (all parts can be replaced individually)
- ISO Class 2 IPA certificate and more than 2,000,000 cycles in the igus® test laboratory
- Individual hoses and cables can be replaced

SCARA cable solution

Durable energy supply for SCARA robots



Modular system, easy to retrofit

Thanks to the outstanding e-skin® cleanroom specifications, the Clean SCARA Cable Solution immediately met the cleanroom requirements for ISO Class 2. This opens up new possibilities for using a SCARA robot in cleanrooms. The rotatable bearing of the standard

SCARA Cable Solution has been adopted and adapted to the e-skin® energy supply system. This means that the two SCARA Cable Solutions cannot be combined with each other.

The Clean SCARA Cable Solution consists of three elements that match the SCARA robot in question or are adapted to it:



- 1 Clean SCARA Cable Solution ball screw connection
- 2 Clean SCARA Cable Solution fixed end
- 3 e-skin® soft SKS20



Clean SCARA Cable Solution ball screw connection

Suitable for Epson, ABB IRB, Fanuc, Yaskawa, KUKA, and Densco

Diameter 16 - 25mm



Clean SCARA Cable Solution fixed end rotating/fixed

Thread M40



SKS20 e-skin® soft

Low clearance height, flexible Filling with proven zipper opening principle

Inner width 33mm

For robots in dry cleanrooms



Robot energy supply system for dry-cleanroom applications

The triflex® energy chain TRC.40.058.0.ESD combined with the associated fibre-rod system represents the first energy supply for dry room applications that can move in three dimensions. In the context of the increasingly present electromobility, which has become an integral part of our everyday lives, requirements for the automated production of lithium-ion batteries have to evolve.

- ▲ Energy chain that is suitable for dry cleanrooms and can move in multiple axes
- ▼ Quick and simple assembly due to prefabricated modules
- Dry cleanroom ISO 4-5 certification from the Fraunhofer IPA
- Standard chainge® material; individual chain links can be replaced. Important contribution to e-mobility

Test report
TRC.40.058.0.ESD with fibre-rod module



Source: Roman Hickel, Fraunhofer IPA

The system was specifically designed for use on industrial robots to ensure a smooth and ideally contact-free production process. The integrated fibre glass rods serve to stabilise the energy chain up to the fifth axis and prevent contact between the industrial robot and the energy chain. The subsequent TRC energy chain enables the movements

to be followed precisely and thus offers a high degree of flexibility, which is particularly advantageous in dynamic areas of application. With thousands of successful applications in conditions other than cleanrooms, the system has been tried and tested in practice and stands for reliability and efficiency.



TRC.40.058.0.ESD
Closed triflex® energy chain in ESD

Size index	30 - 100mm
Bend radius	50-145mm

Test environment:

The system was tested in a dry cleanroom with a dew point of -40°C, which corresponds to a relative humidity of <1% at room temperature of 22°C and the cleanroom class ISO 3 with three different parameter sets:


Parameters	Cleanroom class (according to ISO 14644-1)
$v_1 = 0.5\text{m/s}; a_1 = 1.0\text{m/s}^2$	4
$v_2 = 1.0\text{m/s}; a_2 = 2.0\text{m/s}^2$	4
$v_3 = 2.0\text{m/s}; a_3 = 4.0\text{m/s}^2$	5
Result:	5



TRC.F.40.0800.1.0.ESD
TRC e-chain® reinforced with fibre glass rods

Size index	30 - 100mm
Bend radius	50-145mm
Length	300-2,000mm

Dynamic for cleanrooms

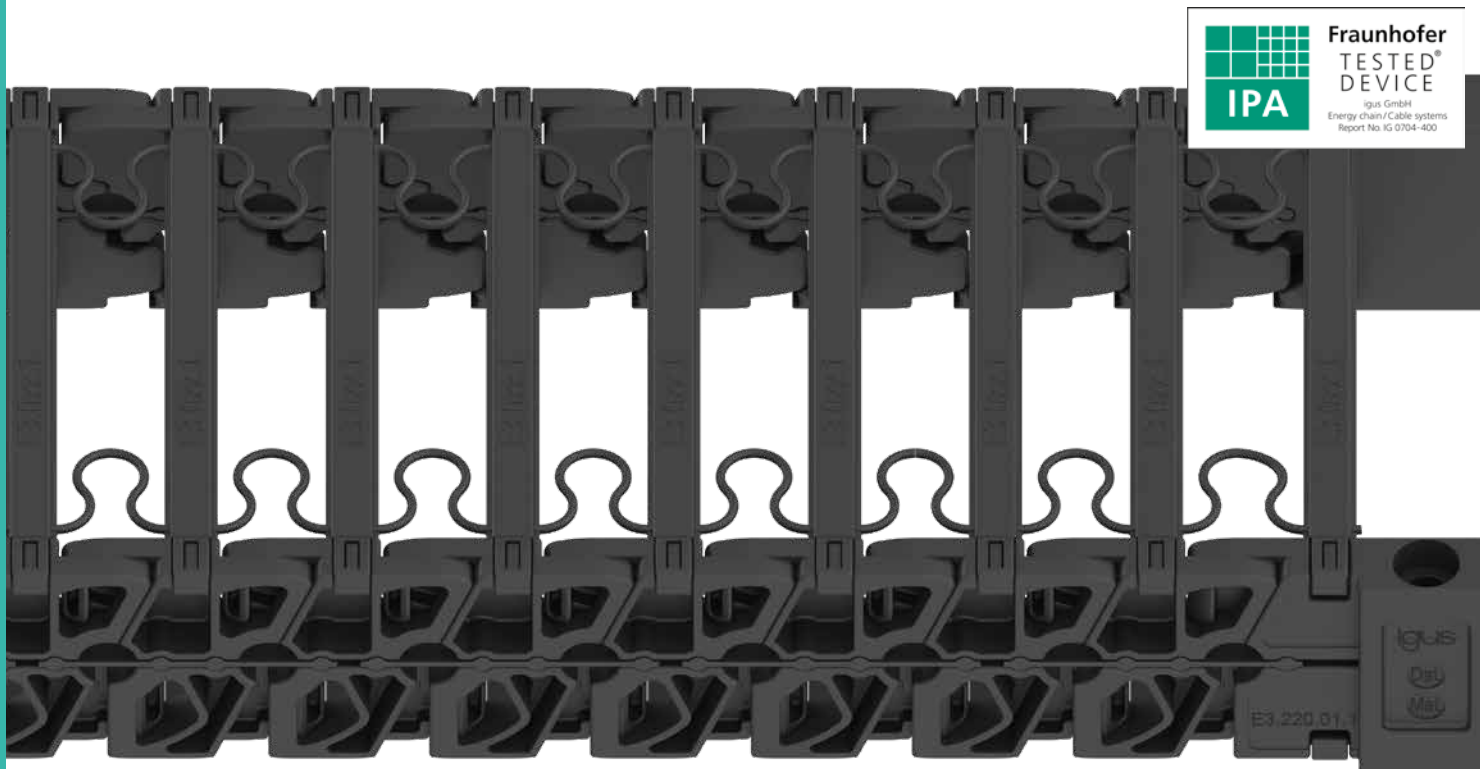

Extremely low noise for extremely small installation spaces

E3 combines small pitch, smooth running, low noise, stability, easy assembly and low cost. The spring connector element replaces the pin and bore and avoids relative movement between the joints. This means virtually no wear or abrasion (cleanroom). To reduce production and assembly costs, the spring connector is on a segment of ten e-chain® links.


- ▲ Low vibration at high speeds and accelerations
- ▼ Quick installation thanks to the crossbar band
- Cleanroom Class ISO 1, Fraunhofer IPA certified
- chainge® standard material

Modular system with high economic efficiency



E3 e-chains® in optional white colour; ideal for cleanroom and medical applications, available upon request


Three-part e-chain®

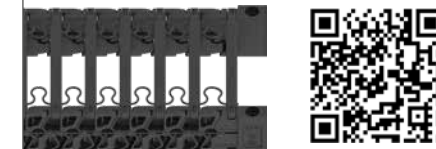

E3.10 e-chain®

Crossbars on a strip - zip-open along the outer radius


Inner height	10mm
Inner width	20 - 60mm

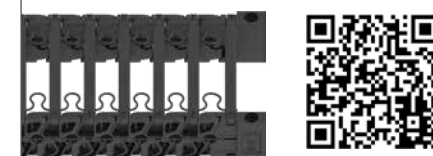

E3.15 e-chain®

Crossbars on a strip - zip-open along the outer radius

Inner height	15mm
Inner width	20 - 60mm

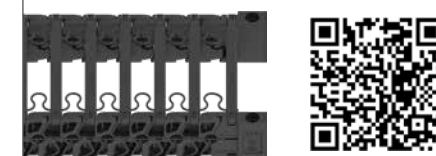

E2.22 e-chain®

Crossbars on a strip - zip-open along the outer radius

Inner height	22mm
Inner width	20 - 60mm

Benefits

- For high accelerations and speeds
- For lightning-fast opening and easy closing
- Quiet: 38dB(A)1) - small pitch for low-vibration operation
- Suitable for cleanrooms according to IPA Cleanroom Class 1

Typical application areas

- Semiconductor manufacturing and handling
- Pick & place robots
- Optics
- Conveyor technology
- Measuring technology
- Printers and plotters
- Cleanroom environments
- General mechanical engineering

Fast assembly:
zip-open along
the outer radius


Dynamic:
high speeds and
accelerations

Modular design:
crossbars, interior
separation and
links all in one band

High strength:
for unsupported
applications

Quick assembly:
openable along
the outer radius

Modular design:
can be easily
lengthened and
shortened

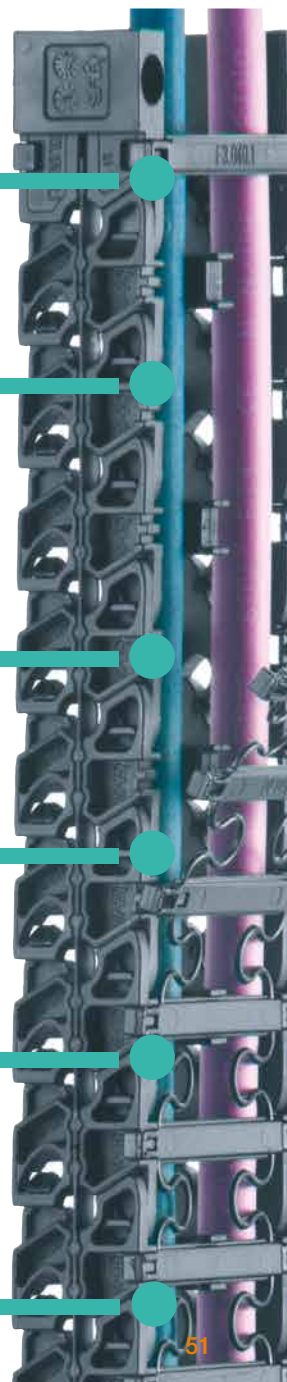

Smooth-operating "T-band"



Lightweight, highly flexible and low-vibration

The T3 system combines low noise operation, simple assembly and economy. The side bands, which snap together, replace a conventional pin and bore connection and prevent relative movements between the joints giving extremely low wear. This means virtually no wear or abrasion (cleanroom). The novel geometrical shape of the t-band, means that hardly any polygon effect is generated in operation. The t-band therefore rolls in a very smooth arc, giving extremely low vibration and noise. In order to reduce the manufacturing and installation costs, the t-band is made in a segment of 8 links. Due to its low mass, the igus® t-band, is suitable for applications with low fill weights and short strokes, combined with high speeds and accelerations.

- ▲ Almost no polygon effect, making it very quiet and low-vibration
- ▼ Lightweight energy chain
- ISO Class 2, Fraunhofer IPA certified
- chainge® standard material

T3 e-chain system® Quiet, low-abrasion energy supply systems



- Benefits**
- Very light e-chain®
 - For high accelerations and speeds
 - Almost no polygon effect
 - Small bend radii and extremely confined installation spaces
 - Quick, easy filling and assembly
 - Quiet at 33dB(A)1) - small pitch for quiet, low-vibration operation

- Typical application areas**
- Printers and plotters
 - Cleanroom applications
 - Production and processing of semiconductors
 - Optics
 - Measuring technology
 - Pick & place machines

Durable energy supply systems for electronics production positioning systems

To safely guide the drive, measuring system, and compressed air lines, readychain® systems are used in this Jenaer Antriebstechnik GmbH positioning unit 24 hours a day, seven days a week. Two very quiet energy chains from the E6 product range are used on the Y-axis on a length of about 2m, and a highly flexible energy chain

from the T3 product range is used on the Z-axis on a length of almost 400mm. Both systems are suitable for production under cleanroom conditions, which also apply during circuit boards exposure and mean that almost no abrasion residue can be generated.

igus.eu/position-system



T-shaped band e-chain



T3.29 e-chain®
Crossbars removable along the inner and outer radius

Inner height	29mm
Inner width	30 - 140mm

- Universal: mounting plates and strain relief option
- Low noise 33dB(A)1): small pitch for low noise, smooth running
- Modular design: t-band in one segment of eight e-chain® links
- Modular: easy to lengthen and shorten at any point
- Easy to use: clip-on interior separation
- Dynamic: high speeds and accelerations
- Efficient: lightweight

chainflex® cables for moving applications



1,350 chainflex® types ...



Control cables

- Bend radii down to 4 x d
- Shielded or unshielded
- Jacket materials: PVC, PUR, TPE



Motor cables

- Shielded and unshielded
- For the most extreme applications
- Jacket materials: PVC, PUR, TPE



Fibre Optic Cables

- Bend radius up to 5xd
- Plastic fibre and glass fibre
- Jacket materials: PVC, PUR, TPE



Bus cables

- Profibus, Profinet, CAN-Bus, Ethernet, CAT7, USB
- Jacket materials: PVC, PUR, TPE
- UL and NFPA79 certification




Special cables

- High tensile strength cables
- Approval for railway technology
- Special conductor materials



Servo and hybrid cables

- Abrasion-optimised
- Seven quality levels
- Jacket materials: PVC, PUR



Measuring system cables

- For high dynamics
- For 22 drive manufacturers
- Jacket materials: PVC, PUR, TPE



Data cables

- For travels up to 400m
- Optimised shields with high coverage
- Jacket materials: PVC, PUR, TPE



Twistable cables


- ± 180° at 5 million/m
- UL and CSA
- Jacket materials: PUR, TPE
- 88 catalogue products from stock

chainflex® design tricks

chainflex® cables are unique

All a customer needs from an energy supply system is that it works. But this means that all sub-components, including the cables inside the system, must be completely reliable. This is just where problems arose in the early 1980s. In extreme cases, failures caused by "corkscrews" and core ruptures brought production to a complete standstill, resulting in high costs.

igus® was the first company to develop entire e-chain systems®. chainflex® cables and e-chains® are tested in combination and optimised. Design principles based on improved expertise and exhaustive testing since 1989 help prevent machine downtime all over the world.



Nils Jäger
Business
Development
Manager chainflex®

Tested and certified

chainflex® - special cables for e-chain systems®

Complex applications with high speeds and cycle and acceleration rates, and those that operate in adverse ambient conditions, require reliable cables for energy supply. They must have EMC safety and comply with standards and guidelines such as UL, CSA, and VDE. They must function reliably with Profibus, Profinet, or Ethernet. And our customers

expect a consistent response to a wide variety of movement types because they need the same electrical specifications in both long linear chains and small torsional movements. Our mission is to ensure all of this non-stop and globally.



* The igus® chainflex® guarantee of up to four years is valid for the number of double strokes calculated according to the online service life calculator (igus.eu/chainflexlife).

Control cables



CF5 For heavy-duty applications, oil-resistant, flame-retardant, ISO Class 2	
Jacket	PVC
Bend radius e-chain®	6.8 x d
Temperature e-chain®	+5°C/+70°C
Double strokes guaranteed:	10 million



CF6 For heavy-duty applications, oil-resistant, flame-retardant, ISO Class 2	
Jacket	PVC
Bend radius e-chain®	6.8 x d
Temperature e-chain®	+5°C/+70°C
Double strokes guaranteed:	10 million

Bus cables



CFBUS.LB For extremely heavy-duty applications, resistant to (bio-)oil, low-temperature-flexible, ISO Class 1	
Jacket	TPE
Bend radius e-chain®	7.5 x d
Temperature e-chain®	-35°C/+70°C
Double strokes guaranteed:	12,500,000

Fibre Optic Cables



CFSOFT1 For extremely heavy-duty applications, oil-resistant, flame-retardant, ISO Class 2	
Jacket	PVC
Bend radius e-chain®	5 x d
Temperature e-chain®	+5°C/+70°C
Double strokes guaranteed:	20,000,000



CFSOFT2 For extremely heavy-duty applications, oil-resistant, flame-retardant, ISO Class 2	
Jacket	PVC
Bend radius e-chain®	5 x d
Temperature e-chain®	+5°C/+70°C
Double strokes guaranteed:	20.000.000



CF9 For extremely heavy-duty applications, resistant to (bio-)oil, low-temperature-flexible, ISO Class 1	
Jacket	TPE
Bend radius e-chain®	5 x d
Temperature e-chain®	-35°C/+100°C
Double strokes guaranteed:	12,500,000



CFLG.LB Graded glass-fibre cable for extremely heavy-duty applications, metal-free, ISO Class 1	
Jacket	TPE
Bend radius e-chain®	5 x d
Temperature e-chain®	-35°C/+80°C
Double strokes guaranteed:	10 million



CFLG.G Glass fibre cable for extremely heavy-duty applications, resistant to (bio-)oil, ISO Class 1	
Jacket	TPE
Bend radius e-chain®	10 x d
Temperature e-chain®	-40°C/+80°C
Double strokes guaranteed:	10 million

Measuring system cables



CF10 For extremely heavy-duty applications, resistant to (bio-)oil, low-temperature-flexible, ISO Class 1	
Jacket	TPE
Bend radius e-chain®	5 x d
Temperature e-chain®	-35°C/+100°C
Double strokes guaranteed:	12,500,000



CF98.PLUS For extremely heavy-duty applications, resistant to (bio-)oil, low-temperature-flexible, ISO Class 1	
Jacket	TPE
Bend radius e-chain®	3 x d
Temperature e-chain®	-35°C/+90°C
Double strokes guaranteed:	100,000,000



CF99.PLUS For extremely heavy-duty applications, resistant to (bio-)oil, low-temperature-flexible, ISO Class 1	
Jacket	TPE
Bend radius e-chain®	3 x d
Temperature e-chain®	-35°C/+90°C
Double strokes guaranteed:	100,000,000



CF211 For medium-duty applications, oil-resistant, shielded, ISO Class 2	
Jacket	PVC
Bend radius e-chain®	10 x d
Temperature e-chain®	+5°C/+70°C
Double strokes guaranteed:	10 million



CF11.D For very heavy-duty applications, resistant to (bio-)oil, free from PVC and halogen, ISO Class 1	
Jacket	TPE
Bend radius e-chain®	6.8 x d
Temperature e-chain®	-35°C/+90°C
Double strokes guaranteed:	12,500,000

Servo cables

Data cables



CF12 For extremely heavy-duty applications, double-shielded, resistant to (bio-)oil, ISO Class 1	
Jacket	TPE
Bend radius e-chain®	10 x d
Temperature e-chain®	-35°C/+100°C
Double strokes guaranteed:	10 million



CF210.UL For medium-duty applications, oil-resistant, shielded, ISO Class 2	
Jacket	PVC
Bend radius e-chain®	10 x d
Temperature e-chain®	+5°C/+70°C
Double strokes guaranteed:	10 million



CF21.UL For heavy-duty applications, oil-resistant, shielded, ISO Class 2	
Jacket	PVC
Bend radius e-chain®	7.5 x d
Temperature e-chain®	+5°C/+70°C
Double strokes guaranteed:	10 million



CF29.D For extremely heavy-duty applications, resistant to (bio-)oil, free from PVC and halogen, ISO Class 1	
Jacket	TPE
Bend radius e-chain®	6.8 x d
Temperature e-chain®	-35°C/+100°C
Double strokes guaranteed:	12,500,000

Hybrid cables

CF220.UL.H

For medium-duty applications,
oil-resistant, flame-retardant,
ISO Class 2

Jacket	PVC
Bend radius e-chain®	10 x d
Temperature e-chain®	+5°C/+70°C
Double strokes guaranteed:	10 million

CF30

For heavy-duty applications,
oil-resistant, flame-retardant,
ISO Class 2

Jacket	PVC
Bend radius e-chain®	7.5 x d
Temperature e-chain®	+5°C/+90°C
Double strokes guaranteed:	10 million

CF37.D

For extremely heavy-duty applications,
resistant to (bio-)oil, free from PVC
and halogen, ISO Class 1

Jacket	TPE
Bend radius e-chain®	7.5 x d
Temperature e-chain®	-35°C/+90°C
Double strokes guaranteed:	12,500,000

CF330.D

For extremely heavy-duty applications,
resistant to (bio-)oil, free from PVC
and halogen, ISO Class 1

Jacket	TPE
Bend radius e-chain®	7.5 x d
Temperature e-chain®	-35°C/+90°C
Double strokes guaranteed:	12,500,000

Motor cables

CF33.UL

For heavy-duty applications,
oil-resistant, flame-retardant,
ISO Class 2

Jacket	PVC
Bend radius e-chain®	7.5 x d
Temperature e-chain®	+5°C/+90°C
Double strokes guaranteed:	10 million

Spindle
cables/single
cores

CF31

For heavy-duty applications,
oil-resistant, flame-retardant,
ISO Class 2

Jacket	PVC
Bend radius e-chain®	7.5 x d
Temperature e-chain®	+5°C/+90°C
Double strokes guaranteed:	10 million

CF38

For extremely heavy-duty applications,
resistant to (bio-)oil, free from PVC
and halogen, ISO Class 1

Jacket	TPE
Bend radius e-chain®	7.5 x d
Temperature e-chain®	-35°C/+90°C
Double strokes guaranteed:	12,500,000

CF340

For extremely heavy-duty applications,
resistant to (bio-)oil, free from PVC
and halogen, ISO Class 1

Jacket	TPE
Bend radius e-chain®	7.5 x d
Temperature e-chain®	-35°C/+90°C
Double strokes guaranteed:	12,500,000

Twistable
cables

CFFLAT

Single-core flat cable for extremely
heavy-duty applications, resistant
to (bio-)oil, ISO Class 1

Jacket	TPE
Bend radius e-chain®	5 x d
Temperature e-chain®	-35°C/+90°C

CFROBOT5

For torsion applications, resistant
to (bio-)oil, UV-resistant,
ISO Class 1

Jacket	TPE
Bend radius e-chain®	10 x d
Temperature e-chain®	-35°C/+80°C
Double strokes guaranteed:	10 million

chainflex® product finder

Easy to find

igus chainflex® product finder

Filter cables

Find cable

chainflex® cable

Category

Bus system

Result: choose from 2 suitable products

Part	Outer jacket	Diameter [mm]	Min. bend radius [mm]	Price €/m
CF908.082	igAPUR	4	60	3.99
CF908.083	igAPUR	4	60	3.99

CF908.082

Number of cores and conductor nominal cross section [mm²]

2x2.5

Diameter: 4 mm

Bend radius: 60 mm

Weight: 0.082 kg/m

Copper: 0.05 kg/m

Additional option

Quantity 1 Pc.

Add to cable pool

igus.eu/quickcable

Special
cables

Find and compare
cables

Find the right chainflex® cable for
your e-chain® application in just
a few clicks. A filter function for
cleanroom suitability is now availa-
ble as well.

Simple calculation

chainflex® Lifetime calculation

Cable

Item: ? Search

or

Cable type:

Control cable

Series:

chainflex® CF880 control cable PVC

Part. No.:

CF880.05.02

E6.29.050.100.0

Used in energy chain® ?

Unsupported

Gliding application

Hanging

Robots

Travel distance: ?

max. 10

 m

or

Cable length in the chain: ? m

Speed: m/s

Working temperature: °C

Acceleration: m/s²

Bending radii: ? mm

Measuring system: ☒ metric ☐ imperial

☐ I accept the [igus® liability disclaimer](#)

Activities

Calculate

With the chainflex® service life calculator, you can easily and quickly calculate the expected service life of chainflex® cables specifically for your application. The unique chainflex® guarantee has now been extended to four years.

igus.eu/chainflexlife



3,800m² test laboratory with over 65 test stations as basis for the chainflex® guarantee promise

The largest test lab for moving cables worldwide

The correct design of a cable and its guaranteed service life actively contribute to sustainability and climate protection. We offer a unique four-year guarantee (previously 36 months) on all chainflex® cables in the catalogue to ensure planning reliability.


This is only possible because igus® has over 30 years of experience and test data in the largest laboratory for cables and e-chains® with 3,800 m². This allows for reliable statements about the durability and service life of a chainflex® cable. The chainflex® laboratory carries out special tests under realistic conditions and collects data from over 2 billion test cycles with more than 1.4 million electrical measurements every year. Continuous monitoring and documentation are conducted on 65 test stations

by professionally qualified personnel. In the process, e-chains® are tested with cables on a wide variety of travels, in horizontal or suspended applications. This also applies to the multidimensionally moving triflex® systems combined with chainflex® CFROBOT cables, where the focus is particularly on torsion resistance. This basis of practical experience and test laboratory made the unique chainflex® guarantee possible.

Benefits

- The industry's largest test lab for moving cables
- 25 years of experience
- 3,800m² test area
- 65 test stations
- 800 parallel tests
- 2 billion double strokes per year
- 1.4 million electric measurements
- Audited and certified by Underwriter Laboratories (UL)



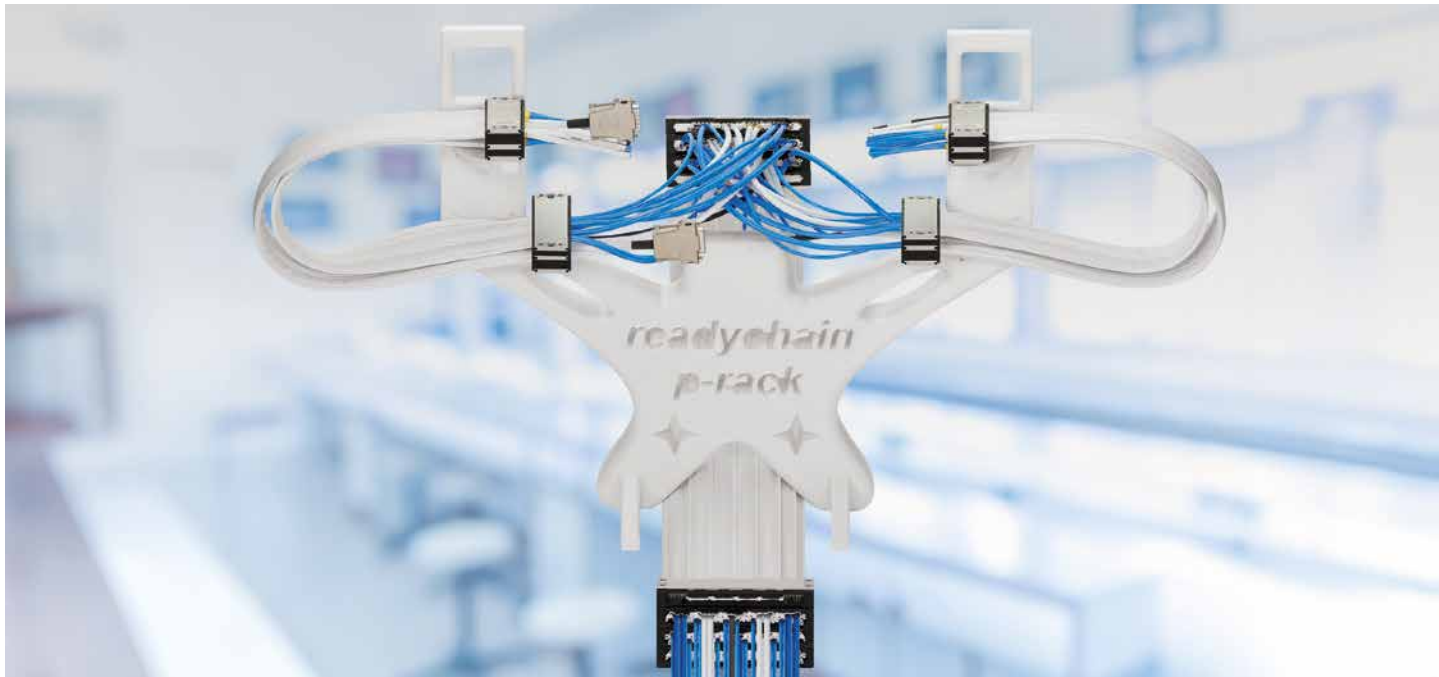

Ready-to-install systems, from connectors to harnessed cables to complex energy supply modules, delivered in one to ten days



Customer-specific production



From one off to mass production

readychains® - increase capacity and cash flow quickly with igus®

- Reduce overhead costs
- Reduce your throughput times from days to hours
- Respond flexibly to order variations
- Use igus® manufacturing capacities and our harnessing know-how

Reduce the number of suppliers and orders by 75%:

- One order, one invoice, one delivery
- A partner for minimal machine downtimes
- All readychain® components are subjected to extensive quality checks and function tests

3

Benefits: readychain® basic



- 

1 ONE supplier - combine suppliers

2 Reduce assembly time

3 Reduce failures

Reduction of assembly time

Reduction of logistics cost

Procurement optimisation

Further information, videos, configurators and product finders

▶ www.igus.eu/RCbasic
- 6

Benefits: readychain® standard


- 

4 No electrical termination needed

5 100% digitally tested

6 No cable surplus

Reduction of assembly time

Reduction of logistics cost

Procurement optimisation


Further information, videos, configurators and product finders

▶ www.igus.eu/RCstandard

9

Benefits: readychain® standard+





7 Reduce interfaces

8 Optimise connections/interfaces

9 Ready-to-install multi-axis system

Reduction of assembly time

Reduction of logistics cost

Procurement optimisation


Further information, videos, configurators and product finders

▶ www.igus.eu/RCstandard+

13

Benefits: readychain® premium





10 Optimise your transport / assembly

11 One single assembly

12 One Part No. / Product group

13 Plug & Play

Reduction of assembly time

Reduction of logistics cost

Procurement optimisation

Further information, videos, configurators and product finders

▶ www.igus.eu/RCpremium

62

igus.eu/cleanroom

63

e-chain®
E2/000



E2/000 series 1500
crossbars openable along the outer radius, from both sides

Inner width	15 - 125mm
Bend radius	035 - 180mm
ISO Class	2



2500 series
crossbars openable along the outer radius, from both sides

Inner width	25 - 125mm
Bend radius	055 - 250mm
ISO Class	3

e-chain®
E4.1



E4.32
e-chains® with crossbars every link. The all-rounder – including for particularly demanding applications

Inner width	50 - 400mm
Bend radius	063 - 300mm
ISO Class	5

e-chain®
E14



E14.3.038.0
Press the cable in along the outer radius

Inner width	38mm
Bend radius	38mm
ISO Class	2




E4Q – the next generation of easy-to-assemble igus® e-chains®

Easy opening and closing, without tools. The latest E4Q e-chains® generation combines proven design features of the 12-year old, robust E4.1 e-chains® standard with new bionic design elements and a novel opening mechanism. This gives the E4Q an even longer service life and significantly improved ease of installation.



Bearing technology cleanroom solutions

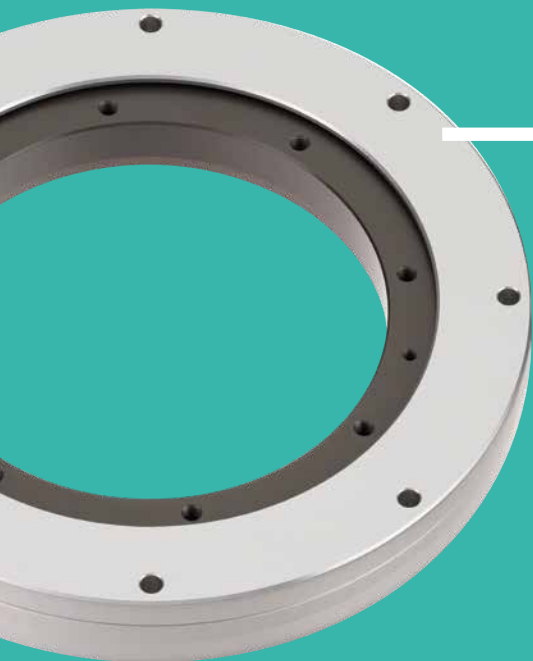


Tested and proven by the
Fraunhofer Institute
(ISO14644-1 Class 3 / 4)

Tested and proven by the
Fraunhofer Institute:
(DIN EN ISO 14644-1, Class 6)



Tested and proven by the
Fraunhofer Institute:
(DIN EN ISO 14644-1, Class 6)

Tested and verified by
the Fraunhofer Institute
(DIN EN ISO 14644-1, Class 5)

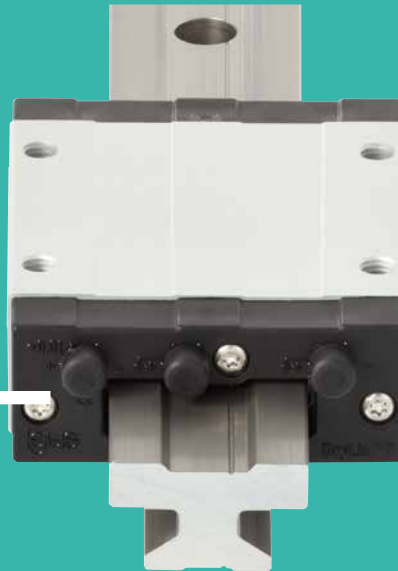

Cleanrooms have special requirements of machines and equipment and of their components. If you are looking for plain bearings for cleanroom-compatible devices, you most likely know about cleanroom specifications. This article

is not so much about definitions and general requirements, but about the specifications that are relevant for plain bearings, and about which plain bearings meet these requirements and how.



Bearing technology Plain bearings for cleanrooms - a spotless solution?



The problem with all cleanroom devices: particles wind up in places besides where abrasion took place

Cleanrooms qualify primarily based on one requirement: they contain only certain amounts of airborne particles of a certain size. And this is the big challenge. Complex ventilation systems and elaborate safety precautions keep out as many existing particles as possible. But what about particles that are generated in the cleanroom? Relative movement of surfaces creates abrasion residue when there is sufficiently high mechanical stress or sufficiently low abrasion resistance. These particles don't have to resemble the residue left behind by an eraser after an extensive modifications to a text. The amount and shape of the abrasion residue depend very much on the material and the condition of the surfaces being used. It also depends on the type of movement and the forces that act during that movement.

Which plain bearings are suitable for the cleanroom?

Plain bearings serve to minimise the abrasion wear that inevitably occurs during relative movement and, above all, to allow abrasion to proceed in a controlled form. On the one hand, movement is to be optimised and as controlled as possible. On the other, the bearing needs to last as long as possible. Both factors favour use in cleanrooms. The less the abrasion residue generated, the fewer the particles that are released. But the difficulty that arises as early as plain bearing selection – when equipment for the cleanroom is being

designed – is determining which abrasion particles will be "generated" and how many. This information is essential to determining the cleanroom class for which the components, or the devices and machines made from them, are suitable. As mentioned above, the number and properties of the particles depends on several parameters. What material are moving parts made of? What surface finish, hardness, and shape do sliding surfaces have? How fast, at what frequency, and in what way do surfaces move relative to each other? What is the ambient temperature? All these factors individually and in combination have different effects on the size and amount of abrasion residue. It is theoretically impossible to determine the interactions of all parameters in advance. Cleanroom classifications can therefore be assigned only to complete assemblies in which these parameters are limited to specific combinations and application scenarios. So plain bearings sold as individual components can have no cleanroom classification.



igidur® PRT-04-100-CR
Low wear and emissions

Inner Ø	100mm
Outer Ø	160mm



drylin® W profile guides
Fully assembled linear carriages with iglidur® J liner

Installation size/shaft Ø	6-25mm
Shaft material	Aluminium



drylin® N low-profile guides
Guide carriage made of iglidur® J, suitable for aluminium design profiles

Rail width	17-80mm
Rail height	6-12mm



drylin® T rail guides
Linear carriage dimensionally identical to recirculating ball bearing guides

System width	17-90mm
System height	8-42mm

Processing thermoplastics

Cleanroom 3D printer




Lead screw nuts made of iglidur® A180

FDA-compliant for the food and pharmaceutical industries




xiros® deep groove ball bearings made of xirodur® B180

Cost-effective all-rounder, FDA-compliant





igubal® flange and pillow block bearings

Economical alternative to metallic solutions




drylin® W linear system

Dirt-resistant and robust, easy assembly

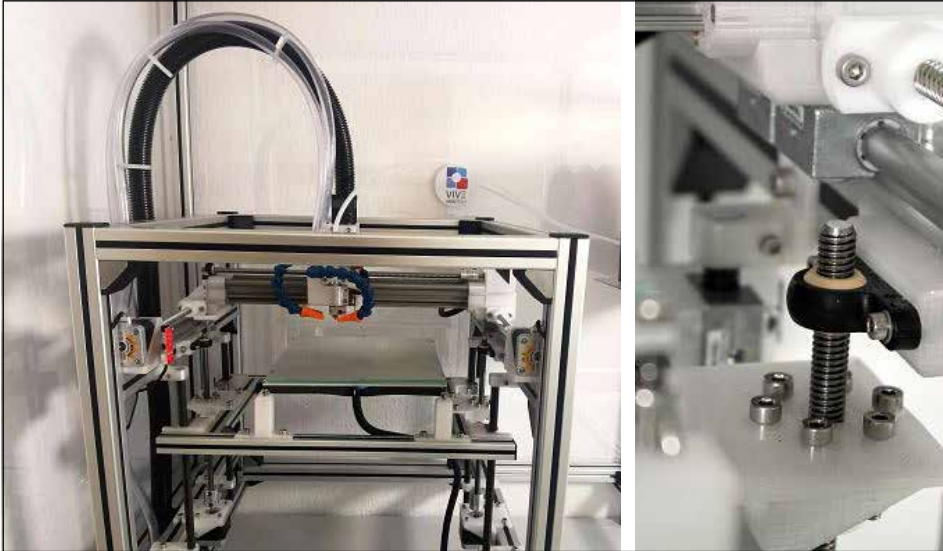

In the VIVECube - Clean and precise polymer bearings are used at various points.

VIVECube - Clean Precision cleanroom 3D printer

VIVE-MedTech GmbH develops and produces customisable and user-focused medical products. The product range extends from surgical instruments and catheters to artificial lungs for use during temporary lung replacement therapy. The products must meet high standards of safety and performance -

- Profile

 - **What was needed:** a precise and reliable cleanroom 3D printer for processing thermoplastics
 - **Requirements:** no lubrication or maintenance, long service life, suitable for cleanrooms, no abrasion, cost-efficient
 - **Products used:** Simple encapsulated stepper motors with coupled dryspin® high helix lead screws and flange lead screw nuts with spanner flats made of iglidur® A180, encapsulated stepper motors with coupled trapezoidal lead screws and flange lead screw nuts made of iglidur® A180, igus® WSX double rail, drylin® W single rails, drylin® R aluminium shafts, igubal® pillow block and flange bearings, xiros® radial deep groove ball bearings

especially with respect to cleanliness and purity from foreign substances. Here, VIVE-MedTech uses a 3D printing production, developed in-house, in the cleanroom: the VIVECube - Clean Precision is a precise, reliable cleanroom 3D printer for processing thermoplastics.

- **Success for the customer:** drylin® bearings with replaceable liners provided design freedom on all linear guides. This significantly accelerated the VIVECube - Clean Precision design process. The liners effectively prevent unwanted particle release while providing process stability. There were further advantages from using suitable rail and shaft guides for system implementation.

igus.eu/cleanroom-printers

Lubrication-free lead screw and linear technology

Filling systems for reaction vessels



- Profile

 - **What was needed:** a clean filling that does not have to be sterile, but very clean, low overall system weight
 - **Requirements:** cleanroom suitability, no lubrication or maintenance, lightweight, precision, fast availability
 - **Material:** trapezoidal lead screw nut made of iglidur® W300, trapezoidal lead screw made of AISI 304 material, drylin® miniature guides
 - **Success for the customer:** "There are many manufacturers of trapezoidal lead screw drives", says Christian Baumann. "What we particularly like about this igus® solution is the combination of stainless-steel lead screw and maintenance-free nut made

of a special plastic." The low coefficient of friction in dry operation and the glide surfaces of the screw drive are convincing in everyday life. Added to this are the lightweight machine elements, which in turn have a positive effect on the overall system weight. In contrast, speed does not play a major role in the overall process. "The operation takes place within seconds," says Albrecht Baumann. "They do not place any special requirements on the machine elements. The most important thing is the precision in feeding the vessels."


igus.eu/filling-system

Lubrication-free lead screw technology

Laboratory equipment for liquid handling

- Profile

 - **What was needed:** an extremely clean application of the igus® products, high efficiency and a fast feed
 - **Requirements:** suitable for hygiene-sensitive areas, lubrication-free, maintenance-free, low coefficients of friction, high pitch, space-saving, quick and easy to replace, lightweight, precise, quickly available, cost-saving
 - **Material:** dryspin® trapezoidal lead screw made of AISI 304 stainless steel and dryspin® trapezoidal lead screw nut made of iglidur® high-performance plastics

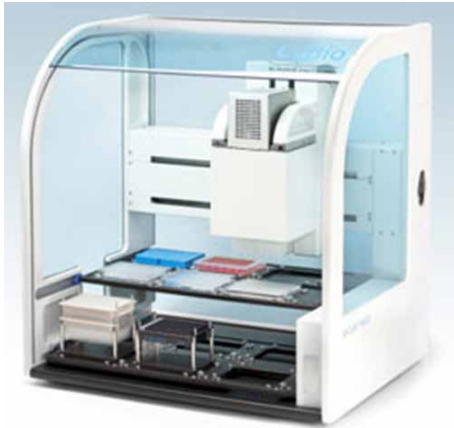

igus.eu/liquids-handling




Lead screw nuts made of iglidur® W300

For heavy-duty applications up to 5MPa




dryspin® trapezoidal lead screw, right-hand thread, stainless steel

Outer diameter	8 - 50mm
Pitch	1.5 - 8mm




drylin® TK-04 miniature guides

Installation size	07-15
-------------------	-------




Lead screw nuts made of iglidur® A180

FDA-compliant for the food and pharmaceutical industries

For dry rooms and cleanrooms



E6.29 – The first e-chain® for IPA ISO Class 4 dry cleanrooms

The proven E6.29 series with its standard inner width is now certified by Fraunhofer IPA for use in dry cleanrooms (ISO Cleanroom Class 4).



Overview

Material selection for cleanrooms


Material	Density [g/cm³]	Colour	Moisture content at saturation after storage at 50% room humidity [% weight]	Fire class	Min. application temperature [°C]	Maximum long-term application temperature [°C]	Maximum short-term application temperature [°C]	Resistance areas
igidur® J	1.49	yellow	0.3	HB	-50	90	120	Insulating
igidur® P	1.58	black	0.2	HB	-40	130	200	Insulating
igidur® P210	1.40	yellow	0.3	HB	-40	100	160	Insulating
igidur® H1	1.53	cream	0.1	V-0	-40	200	240	Insulating
igidur® X	1.44	black	0.1	V-0	-100	250	315	conductive
igidur® F2	1.52	black	0.2	HB	-40	120	165	ESD
igidur® H370	1.66	grey	0.1	V-0	-40	200	240	conductive

igus® worldwide

igus® Offices	11 China
igus® Distributors	igus® Shanghai Co., Ltd. No.50, North Huancheng Road Fengxian district Shanghai 201401 P. R. China Phone +86 21 8036 6999 Fax +86 21 8036 6116 cnmaster@igus.net
1 Germany	12 Colombia
igus® GmbH Spicher Str. 1a 51147 Köln PO Box 90 61 23 51127 Köln Phone 02203 9649-0 Fax 02203 9649-222 info@igus.de	PRODUCTOS I SAS Carrera 28a, 15-18 Local 1, Paloquemao, Bogotá Phone +57 1 561 2959 ext. 113 igus@igus.com.co
2 Argentina	13 Costa Rica
Borintech SRL Av. Elcano 4971 C1427CIH Buenos Aires Phone +5411 4556 1000 igus@borintech.com	Enesa Equipos Neumaticos S.A. Del Colegio Marista 100 este, 200 sur, 25 este Urbanizacion Ciruelas Alajuela, Costa Rica Phone +506 2440-2393 Fax +506 2440-2393 equiposneumaticos@enesa.net
3 Australia	14 Croatia
Treotham Automation Pty. Ltd. 14 Sydenham Road Brookvale NSW 2100 Phone +61 2 9907-17 88 Fax +61 2 9907-1778 info@treotham.com.au	Hennlich, Industrijska d.o.o. Stupničkoobreška 17 Stupnicki Obrez 10255 Gornji Stupnik Phone +385 1 3874334 Fax +385 1 3874336 hennlich@hennlich.hr
4 Austria	15 Cyprus
igus® polymer Innovationen GmbH Photo-Play-Straße 1 4860 Lenzing Phone +43 7662 57763 Fax +43 7662 57751 igus-austria@igus.de	G.C.V. Spare Parts & Services Ltd (HQ) Industrial Area Anatoliko 8068 Pafos Phone +357 26 812444 Fax +357 26 812447 igus@gcv-parts.com
5 Belgium/Luxemburg	16 Czech Republic
igus® B.V.B.A. Jagersdreef 4A 2900 Schoten Phone +32 3 330 13 60 Fax +32 3 313 79 91 info@igus.be	HENNLICh s.r.o. Českolipská 9 412 01 Litoměřice Phone e-chains® +420 416 711332 Phone Plain bearings +420 416 711339 Fax +420 416 711999 lin-tech@hennlich.cz
6 Bosnia + Herzegowina	17 Denmark
HENNLICh industrijska tehnika d.o.o. Zujevinska br. 10 71210 Iliđa - Sarajevo Phone +387 33 451 439 Fax +387 33 451 439 info@hennlich.ba	igus® ApS Lysholt Alle 8 DK-7100 Vejle Phone +45 86 603373 Fax +45 86 603273 info@igus.dk
7 Brazil	18 Ecuador
igus® do Brasil Ltda. Rua Antônio Christi, nº 611 Parque Industrial III – FAZGRAN Jundiaí – CEP 13213-183 – SP Phone +55 11 3531-4487 Fax +55 11 3531-4488 vendas@igus.com.br	Ecuainsetec Yugoeslavia N34-110 y Azuay Quito Phone +593 2 2253757 Fax +593 2 2461833 info@ecuainsetec.com.ec
8 Bulgaria	19 Egypt
Hennlich OOD, BG 4003 Plovdiv, Bulgaria 147A, Brezovsko shose Str., Rota center, fl. 3 Phone +359 32 511 326 Fax +359 32 621 929 office@hennlich.bg	IEE International Company for Electrical Engineering 2nd floor, 25 Orabi St Down Town, Cairo Phone +202 25767370 Fax +202 25767375 sales@iee-egypt.com
9 Canada	20 Estonia
igus® Office Canada Suite 100-180 Bass Pro Mills Dr Vaughan, ON L4K 5W4 Phone +1 905 7608448 Fax +1 905 7608688 webmaster@igus.com	igus® OÜ Vana-Tartu mnt 79a 75312 Peetri Phone +372 667 5600 info@igus.ee
10 Chile	
Vendortec Avda. Los Pajaritos 3195, Oficina 1410 Edificio Centro Maipú Maipú – Santiago Phone +56 22 710 58 25 +56 23 245 02 00 ventas@vendortec.cl	

21 Finland	30 Italy
OEM Finland OY Fiskarsinkatu 3 20750 Turku PL 9, 20101 Turku Phone +358 20 7499499 Phone +358 20 7499456 info@oem.fi	igus® S.r.l. Via delle Rovedine, 4 23899 Robbiate (LC) Phone +39 0395906.1 Fax +39 0395906.222 igusitalia@igus.it
22 France	31 Japan
igus® SARL 49, avenue des Pépinières Parc Médicis 94260 Fresnes Phone +33 1 49840404 Fax +33 1 49840394 info@igus.fr	igus® k.k. Arcacentral 15F, 1-2-1 Kinshi, Sumida-ku Tokyo JAPAN Zip 130-0013 Phone +81 358 192030 Fax +81 358 192055 info@igus.co.jp
23 Greece	32 Kazakhstan
J. & E. Papadopoulos S.A. 12 Polidefkous str Piraeus, 185 40 Phone +30 210 4113133 Fax +30 210 4116781 sales@papadopoulos-sa.com	HENNLICh TOO Kamali Dyusembekova Street 1/5 100022 Kazybek Bi R-N, Karaganda City Phone +7 701 419 0756 +7 7212 78 06 70 igus@hennlich.kz
24 Hong Kong	33 Kenya
Sky Top Enterprises Ltd. Room 1806 ; Block C; Wah Tat Industrial Center; Wah Sing Street; Kwai Chung Hong Kong Phone +852 23318928 Fax +852 24269738 info@skytop.com.cn	Mantrad Ltd. Sterling House, 1St. Floor Moi Avenue, Mombasa Phone + 254 722 706 830 Fax + 254 720 765 566 info@mantrad.co.ke
25 Hungary	34 Latvia
igus® Hungária Kft. Ipári Park u.10. 1044 Budapest Phone +36 1 3066486 Fax +36 1 4310374 info@igus.hu	Techvitas SIA Daugavas iela 38-3 Mārupe, LV-2167 Phone +371 22 325 004 i_igusLettland_G@igus.de
25 Hungary	35 Lebanon
Tech-Con Kft. Veső utca 9-11 1133 Budapest Phone +36 1 4124161 Fax +36 1 4124171 tech-con@tech-con.hu	Mecanix Shops SAL Horsh Tablet - Ste Rita blvd P.O.Box: 55384 Beirut Phone +961 1 486701 Fax +961 1 490929 sales@mecanixshops.com
26 India	36 Lithuania
igus® (India) Pvt. Ltd. 36/1, Sy No. 17/3 Euro School Road, Dodda Nekkundi Industrial Area, - 2nd Stage Mahadevapura Post Bangalore 560048 Phone +91 80 68127800 Fax +91 80 68127802 info-in@igus.net	Hitech UAB Terminalo g. 3 54469 Biruliskiu k. (Kauno LEZ) Kauno raj. Phone +370 37 323271 Fax +370 37 203273 info@hitech.lt
27 Indonesia	37 Mazedonien, Albania, Kosovo
PT igus® Indonesia Headquarter Indonesia Taman Tekno BSD Sektor XI, Blok L1 No. 15 Tangerang Selatan 15314 Phone +62 21 7588 1933 Fax +62 21 7588 1932 id-info@igus.net	Hennlich doo Beograd Radomira Markovica 1/3 11222 Beograd Phone +381 11 63 098 17 Fax +381 11 63 098 20 office@hennlich.rs
28 Ireland	38 Malaysia
igus® Ireland Caswell Rd Northampton NN4 7PW Phone +44-1604 677240 Fax +44-1604 677242 sales@igus.ie	igus® Malaysia Sdn Bhd Suite 1601-1, Level 16, Tower 2, Wisma AmFirst, Jalan SS 7/15 (Jalan Stadium), 47301 Kelana Jaya, Selangor Phone +603 7803 0618 Fax +603 7886 1328 my-info@igus.net
29 Israel	39 Morocco
Conlog LTD PO Box 3265 17 Hametfalsim Str. Industrial Zone Kiryat Arie Petach-Tikva 49130 Phone +972 3 9269595 Fax +972 3 9233367 conlog@conlog.co.il	AFIT 5, Rue Amir Abdelkader 20300 Casablanca Phone +212 522 633769 Fax +212 522 618351 souria.vu@premium.net.ma
40 Mexico	
igus® México S. de R.L. de C.V. Boulevard Aeropuerto Miguel Alemán 160 Int. 135 Col. Corredor Industrial Toluca Lerma Lerma, Estado de México C.P. 52004 Phone +52 728284 3185 Fax +52 728284 3187 fmarquez@igus.com	

41 Middle East	42 Myanmar
JISigus Middle East FZE FF07, Jebel Ali Free Zone PO Box- 17483 Dubai, United Arab Emirates Phone +971 4222 1185 Fax +971 4222 1186 info@jisigus.com	Sea Lion Co. Ltd. 181 Bo Myat Tun St Botataung Yangon 1161 Myanmar Phone +95 1 29 97 97 Fax +95 1 20 27 51 zaw.m.thant@sealionmyanmar.com
43 Netherlands	43 Netherlands – dry-tech®
igus® B.V. Sterrenbergweg 9 3769 BS Soesterberg Phone +31 346 353932 Fax +31 346 353849 info@igus.nl	Elcee B.V. Kamerlingh Onnesweg 28 NL-3316 GL Dordrecht Phone +31 (0)78-654 47 77 Fax +31 (0)78-654 47 33 info@elcee.nl
44 Nigeria	45 New Zealand
Deepee Industrials Ltd. 11 Ishaga Road Surulere Lagos Phone +234 803 3899107 ovoachinike@deepeeindustrials.com	Treotham Automation Pty Ltd. Level 4, 21 Putney Way Manukau, Auckland 2104 Phone +64 9 278 6577 Fax +64 9 278 6578 info@treotham.co.nz
46 Norway	47 Peru
ASI Automatikk AS Level 4, 21 Putney Way Manukau, Auckland 2104 Phone +64 9 278 6577 Fax +64 9 278 6578 info@asiflex.no	PROIGUS S.A.C. Calle Bolívar 388/of. 203 Miraflores Lima 18 – Perú Phone +51 1 2414370 Fax +51 1 2428608 profacoventas@profaco.com
48 Pakistan	49 Philippines
GEMS International Trading 501, Windsong Place, Block 7&8, K.C.H.S. Off Shaheed-e-Millat Rd. Karachi - 75350 Phone +92 21 34531505 marketing@gemsinter.com	Silicon Exponents Corp. Unit 1-B, 8414 LMN Bldg. Dr. A. Santos Avenue Brgy.BF Homes Sucat Parañaque City 1700 Philippines Phone +63 2 8250 126/135 Fax +63 2 8250 141 ryemrigror@sieplus.ph
50 Poland	
igus® Sp. z o.o. ul. Działkowa 121C 02-234 Warszawa Phone +48 22 8635770 Fax +48-22 8636169 info-pl@igus.net	

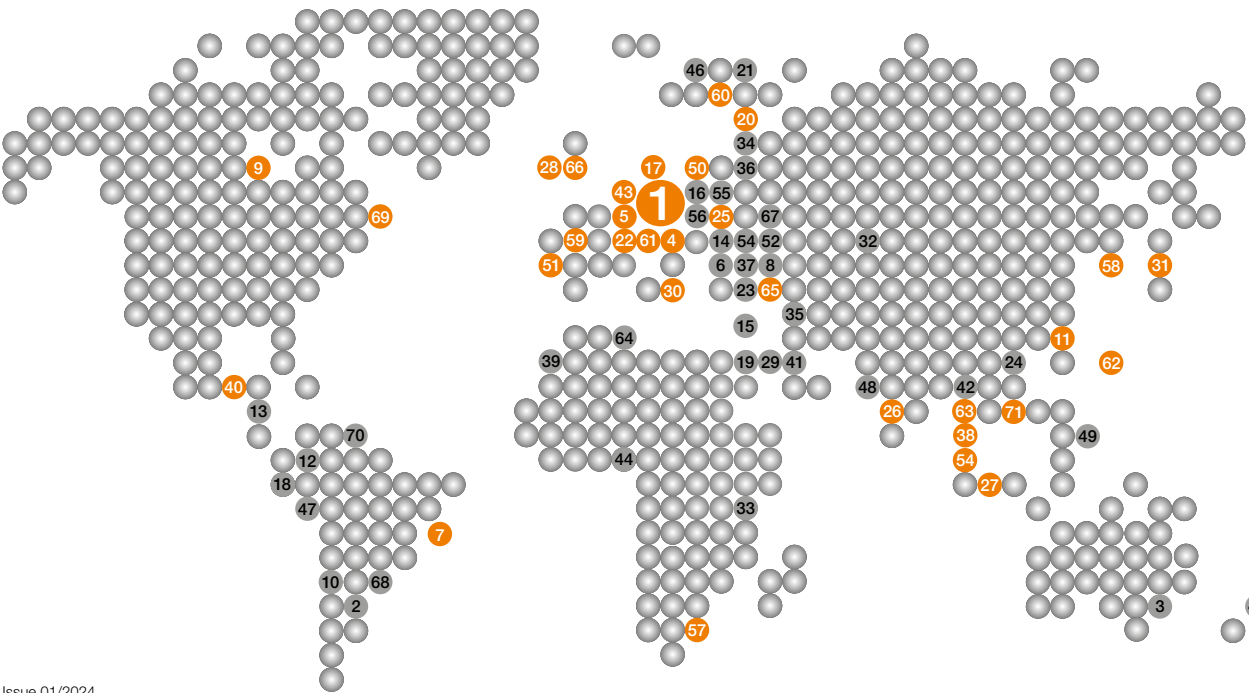

Issue 01/2024

51 Portugal	57 South Africa	61 Switzerland	66 United Kingdom	71 Vietnam
igus® Lda. R Eng° Ezequiel Campos, 239 4100-232 Porto Phone +251 226109000 info@igus.pt	igus® Pty. Ltd. Unit 29 Midline Business Park Cnr Le Roux & Richards Drive Midrand 1682 Phone +27 11312-1848 Fax +27 11312-1594 sales.sa@igus.de	igus® Schweiz GmbH Winkelstr. 5 4622 Egerkingen Phone +41 62 388 97 97 Fax +41 62 388 97 99 info@igus.ch	igus® Caswell Rd Northampton NN4 7PW Phone +44 1604 677240 sales@igus.co.uk	igus® Vietnam Company Ltd Unit 4, 7th Floor, Standard Factory B, Tan Thuan Export Processing Zone Tan Thuan Street District 7, HCM City, Vietnam Phone +84 28 3636 4189 vn-info@igus.net
52 Romania	58 South Korea	62 Taiwan	67 Ukraine	
Hennlich SRL Str. Timotei Cipariu, Nr. 5-7 310213 Arad Phone +40 257 211119 Fax +40 257 211021 igus@hennlich.ro	igus® Korea Co. Ltd. Venture-ro 12-42, Yeonsu-gu Incheon city, 22011 Phone +82 32 82129-11 Fax +82 32 82129-13 kr-info@igus.net	igus® Taiwan Company Ltd. 5F, No. 35, 24th Road Taichung Industrial Park Taichung 40850 Phone +886 4 2358-1000 Fax +886 4 2358-1100 info@igus.com.tw	Hennlich Ukraine LLC (HQ) Kramatorska Street 15 84100 Sloviansk City, Donetsky Region Phone +38 06262 33540 hennlich@hennlich.com.ua	
53 Serbia + Montenegro	59 Spain	63 Thailand	67 Ukraine	
Hennlich doo Beograd Radomira Markovica 1/3 11222 Beograd / Srbija Phone +381 11 63 098 17 Fax +381 11 63 098 20 office@hennlich.rs	igus® S.L. Ctra. Llobatona, 6 Polígono Noi del Sucre 08840 Viladecans – BCN Phone +34 93 647 39 50 Fax +34 93 647 39 51 igus.es@igus.es	IGUS MOTION PLASTICS (THAILAND) CO LTD. 1340 Soi Bangkok-Nonthaburi 30, Bangkok-Nonthaburi Rd., Bangsue, Bangsue Bangkok 10800 Phone +66 (0)2 587 4899 Fax +66 (0)2 587 4898 th-info@igus.net	Cominpro GmbH Romena Rollana 12, Office 100 61058 Kharkov Phone/Fax +38 057-7174914 Mobile +38 050-4012625 cominpro@gmail.com	
54 Singapore – ASEAN HQ	60 Sweden	64 Tunisia	68 Uruguay	
igus® Singapore Pte Ltd 84 Genting Lane #06-03 Axxel Innovation Centre Singapore 349584 Phone +65 6487 1411 sg-info@igus.net	igus® AB Berga Allé 1 254 52 Helsingborg Phone +46 42 329270 Fax +46 42 211585 info@igusab.se	BOUDRANT 53, Avenue de Carthage 1000 Tunis – Tunisia Phone +216 71340244 Fax +216 71348910 info@boudrant.com.tn	Larrique Rulemanes SA Galicia 1204 Montevideo-Uruguay Phone +598 29021773 Fax +598-29084824 larrique@larrique.com.uy	
55 Slovakia	60 Sweden – the-chain	65 Turkey	69 USA	
HENNLICh s.r.o. Košťany nad Turcom 543 SK-038 41 Košťany nad Turcom Phone +421 43 421 2352 lintech@hennlich.sk	OEM Automatic AB Box 1011 Dalagatan 4 573 28 Tranås Phone +46 75 2424100 Fax +46 75 2424159 info@oemautomatic.se	igus® Turkey Güzeller Org. San. Bölğ. Galvano Teknik San. Sit. Cumhuriyet Cad. 2/32 P.K. 41400 Gebze / Kocaeli Phone +90 262 502 14 08 Fax +90 262 502 14 19 info@igus.com.tr	igus® inc. 257 Ferris Avenue PO Box 14349 East Providence RI 02914 Phone +1 401 4382200 Fax +1 401 4387270 webmaster@igus.com	
56 Slovenia	61 Sweden – dry-tech®		70 Venezuela	
Hennlich d. o. o. Ulica Mirka Vahnova 13 SI-4000 Kranj Slovenija Phone +386 4 53206-10 info@hennlich.si	Colly Components AB Raseborgsgatan 9 PO Box 76 164 94 Kista Phone +46 8 7030100 Fax +46 8 7039841 info@me.colly.se		Neumatica Rotonda C.A. Prolong Av. Michelena C.C. Atlas Locales B-10 y B-11 Valencia, Edo. Carabobo Phone +58 241 832.64.64 +58 241 832.32.50 +58 241 838.88.19 Fax +58 241 832.62.83 ventas@neumaticar.com	

igus® experts for cleanrooms



Peter Mattonet
Product & Industry Manager
Mikroelectronics
Mobile: +49 172 2821337
pmattonet@igus.net



Bastian Lenz
Key Account
Mikroelectronics
Mobile: +49 172 3969697
blenz@igus.net

igus.eu/cleanroom



igus® GmbH
Spicher Str. 1a
51147 Köln

Phone +49 2203 9649-800

Fax +49 2203 9649-222

info@igus.de

www.igus.eu

Disclaimer

Legal information: The information in this publication, and the technical data in particular, is based on our current knowledge of the products described as of 11/2023. The information in this publication does not constitute a legally binding assurance of specific properties or of suitability for a specific purpose. Due to constant technical refinement, we reserve the right to make technical changes to products at any time.

Subject to printing errors.

Copyright

The articles and illustrations published in this brochure are protected by copyright. Any use not permitted by copyright law requires prior written consent from igus® GmbH. This applies explicitly to reproduction, processing, translation, storage, editing, and transfer of content to other media (including electronic media), databases, or systems.

[igus.eu/disclaimer](https://www.igus.eu/disclaimer)